



# User Manual

## FGW4148-16S/32S/48S

---

# Contents

---

<b>About This User Guide .....</b>	<b>1</b>
Contacting FlyingVoice .....	2
Purpose .....	3
Cross references .....	3
Feedback .....	3
Declaration of Conformity .....	4
Part 15 FCC Rules .....	4
Warnings and Notes .....	5
Warnings .....	5
Notes .....	5
<b>Chapter 1 Product description .....</b>	<b>6</b>
FGW4148-16S/32S/48S .....	7
LED Indicators and Interfaces .....	8
FGW4148-16S .....	8
FGW4148-32S .....	9
FGW4148-48S .....	10
Hardware Installation .....	11
<b>Chapter 2 IVR Voice Prompt .....</b>	<b>13</b>
Voice adapter Configuration Method (IVR) .....	14
Start IVR .....	14
IVR Description .....	14
<b>Chapter 3 Basic Settings .....</b>	<b>20</b>
WEB Page .....	21
About Password .....	21
URL Format .....	21
WEB Interface Introduction .....	23
SIP Account Register .....	24
Register one by one .....	24
Batch Registration .....	25
Basic Function .....	26
Calling phone or extension numbers .....	26

Direct IP calls .....	26
Call Hold .....	27
Call transfer .....	27
Conference .....	28
<b>Chapter 4Web Interface .....</b>	<b>29</b>
Login .....	30
Status .....	31
Network .....	31
WAN .....	31
LAN .....	38
VPN .....	39
DMZ .....	41
MAC Clone .....	42
Port Setting .....	42
Routing .....	43
SIP Account .....	44
Account .....	44
FXS Settings .....	45
SIP Settings .....	50
VoIP QoS .....	50
Phone .....	52
Preferences .....	52
Dial Rule .....	56
Call Log .....	57
Administration .....	58
Management .....	58
Firmware Upgrade .....	63
Scheduled Tasks .....	63
Provision .....	64
SNMP .....	66
TR-069 .....	66
Diagnosis .....	68
Operating Mode .....	69
System Log .....	69
Logout .....	70
Reboot .....	70
<b>About This User Guide .....</b>	<b>1</b>

Contacting FlyingVoice .....	2
Purpose .....	3
Cross references .....	3
Feedback .....	3
Declaration of Conformity .....	4
Part 15 FCC Rules .....	4
Warnings and Notes .....	5
Warnings .....	5
Notes .....	5
<b>Chapter 1 Product description .....</b>	<b>6</b>
FGW4148-16S/32S/48S .....	7
LED Indicators and Interfaces .....	8
FGW4148-16S .....	8
FGW4148-32S .....	9
FGW4148-48S .....	10
Hardware Installation .....	11
<b>Chapter 2 IVR Voice Prompt .....</b>	<b>13</b>
Voice adapter Configuration Method (IVR) .....	14
Start IVR .....	14
IVR Description .....	14
<b>Chapter 3 Basic Settings .....</b>	<b>20</b>
WEB Page .....	21
About Password .....	21
URL Format .....	21
WEB Interface Introduction .....	23
SIP Account Register .....	24
Register one by one .....	24
Batch Registration .....	25
Basic Function .....	26
Calling phone or extension numbers .....	26
Direct IP calls .....	26
Call Hold .....	27
Call transfer .....	27
Conference .....	28
<b>Chapter 4 Web Interface .....</b>	<b>29</b>

Login .....	30
Status .....	31
Network .....	31
WAN .....	31
LAN .....	38
VPN .....	39
DMZ .....	41
MAC Clone .....	42
Port Setting .....	42
Routing .....	43
SIP Account .....	44
Account .....	44
FXS Settings .....	45
SIP Settings .....	50
VoIP QoS .....	50
Phone .....	52
Preferences .....	52
Dial Rule .....	56
Call Log .....	57
Administration .....	58
Management .....	58
Firmware Upgrade .....	63
Scheduled Tasks .....	63
Provision .....	64
SNMP .....	66
TR-069 .....	66
Diagnosis .....	68
Operating Mode .....	69
System Log .....	69
Logout .....	70
Reboot .....	70
<b>Chapter 5 IPv6 address configuration .....</b>	<b>71</b>
Introduction .....	72
IPv6 Advance .....	73
Configuring IPv6 .....	75
Viewing WAN port status .....	75
LAN DHCPv6 .....	76

<b>Chapter 6Troubleshooting Guide .....</b>	<b>80</b>
Configuring PC to get IP Address automatically .....	81
Cannot connect to the Web .....	82
Forgotten Password .....	82

---

# Table

---

Table 1 Features at-a-glance .....	7
Table 2 FGW4148-16S Front panel .....	8
Table 3 FGW4148-16S Rear panel .....	8
Table 4 FGW4148-32S Front panel .....	9
Table 5 FGW4148-32S Rear panel .....	9
Table 6 FGW4148-48S Front panel .....	10
Table 7 FGW4148-48S Rear panel .....	10
Table 8 IVR Menu Setting Options .....	15
Table 9 WEB Interface Introduction .....	23
Table 10 Config SIP the Web Management Interface .....	24
Table 11 Login details .....	30
Table 12 Static IP .....	32
Table 13 DHCP .....	33
Table 14 PPPoE .....	34
Table 15 Bridge Mode .....	36
Table 16 LAN port .....	38
Table 17 PPTP .....	39
Table 18 L2TP .....	40
Table 19 OpenVPN .....	41
Table 20 DMZ .....	41
Table 21 MAC Clone .....	42
Table 22 Port setting .....	42
Table 23 Routing .....	43
Table 24 Line .....	45
Table 25 Audio configuration .....	46
Table 26 Supplementary service .....	47
Table 27 Advanced .....	47
Table 28 SIP Settings .....	50
Table 29 VoIP QoS .....	51
Table 30 Preferences .....	52
Table 31 Regional .....	52
Table 32 Features and call forward .....	54

Table 33 Miscellaneous .....	55
Table 35 Dial Plan Syntactic .....	56
Table 36 Call log .....	57
Table 37 Save Config File .....	58
Table 38 Administrator settings .....	59
Table 39 NTP settings .....	60
Table 40 Daylight Saving Time .....	61
Table 41 System log Setting .....	61
Table 42 Factory Defaults Setting .....	62
Table 43 Factory Defaults .....	62
Table 44 Firmware upgrade .....	63
Table 45 Scheduled Tasks .....	63
Table 46 Provision .....	64
Table 47 Firmware Upgrade .....	65
Table 48 SNMP .....	66
Table 49 TR069 .....	67
Table 50 Diagnosis .....	68
Table 51 Operating mode .....	69
Table 52 System log .....	69
Table 53 Logout .....	70

---

# About This User Guide

---

Thanks for choosing FGW4148-16S/32S/48S router with VoIP. This product will allow you to make ATA call using your broadband connection.

This manual provides basic information on how to install and connect FGW4148-16S/32S/48S router with VoIP to the Internet. It also includes features and functions of router with VoIP components, and how to use it correctly.

Before you can connect FGW4148-16S/32S/48S to the Internet and use it, you must have a high-speed broadband connection installed. A high-speed connection includes environments such as DSL, cable modem, and a leased line.

FGW4148-16S/32S/48S router with VoIP is a stand-alone device, which requires no PC to make Internet calls. This product guarantees clear and reliable voice quality on Internet, which is fully compatible with SIP industry standard and able to interoperate with many other SIP devices and software on the market.



This guide contains the following chapters:

- [Chapter 1 Product description](#)
- [Chapter 2 IVR Voice Prompt](#)
- [Chapter 3 Basic Settings](#)
- [Chapter 4 Web Interface](#)
- [Chapter 5 Troubleshooting Guide](#)

## Contacting FlyingVoice

Main website: <http://www.flyingvoice.com/>

Sales enquiries: [sales1@flyingvoice.com](mailto:sales1@flyingvoice.com)

Support enquiries: [support@flyingvoice.com](mailto:support@flyingvoice.com)

Hotline: 010-67886296 0755-26099365

Address: Room508-509, Bldg#1, Dianshi Business Park, No.49 BadachuRd,Shijingshan District, Beijing, China

## Purpose

The documents are intended to instruct and assist personnel in the operation, installation and maintenance of the FlyingVoice equipment and ancillary devices. It is recommended that all personnel engaged in such activities be properly trained. FlyingVoice disclaims all liability whatsoever, implied or express, for any risk of damage, loss or reduction in system performance arising directly or indirectly out of the failure of the customer, or anyone acting on the customer's behalf, to abide by the instructions, system parameters, or recommendations made in this document.

## Cross references

References to external publications are shown in italics. Other cross references, emphasized in blue text in electronic versions, are active links to the references.

This document is divided into numbered chapters that are divided into sections. Sections are not numbered, but are individually named at the top of each page, and are listed in the table of contents.

## Feedback

We appreciate feedback from the users of our documents. This includes feedback on the structure, content, accuracy, or completeness of our documents. Send feedback to [support@flyingvoice.com](mailto:support@flyingvoice.com).

# Declaration of Conformity

---

## Part 15 FCC Rules

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

## Class B Digital Device or Peripheral

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment can generate, use and radiate radio frequency energy. If not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference does not occur in a particular installation.

---



### Notes

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

---

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interferences by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# Warnings and Notes

---

The following describes how warnings and notes are used in this document and in all documents of the FlyingVoice document set.

## Warnings

Warnings precede instructions that contain potentially hazardous situations. Warnings are used to alert the reader to possible hazards that could cause loss of life or physical injury. A warning has the following format:



### Warning

Warning text and consequence for not following the instructions in the warning.

---

## Notes

A note means that there is a possibility of an undesirable situation or provides additional information to help the reader understand a topic or concept. A note has the following format:



### Notes

Notes text and consequence for not following the instructions in the Notes.

---

---

# Chapter 1 Product description

---

This chapter covers:

- [FGW4148-16S/32S/48S](#)
- [LED Indicators and Interfaces](#)
- [Hardware Installation](#)

# FGW4148-16S/32S/48S


**Table 1** Features at-a-glance

Port/Model	FWG4148-16S	FWG4148-32S	FWG4148-48S
picture			
Ethernet interface	2*RJ45 10/100/1000M (WAN/LAN)	2*RJ45 10/100/1000M (WAN/LAN)	2*RJ45 10/100/1000M (WAN/LAN)
FXS	16	32	48
SIP Account	16	32	48
Wire-speed NAT	Support	Support	Support
DHCP	Client/Server	Client/Server	Client/Server
Voice Code	G.711 (A-law, U-law), G.729A/AB,G.723,G.722		
Management	Voice menu, Web Management, Provision:TFTP/HTTP/HTTPS, TR069, SNMP		
Fax	T.30, T.38 Fax		

# LED Indicators and Interfaces


## FGW4148-16S

**Table 2** FGW4148-16S Front panel

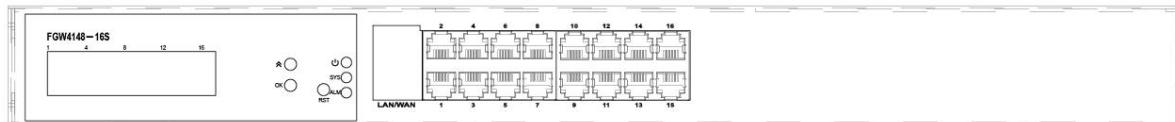

LED/Interface	Status	Description
<b>LED</b>		
LED Screen		The screen will appear the information about the device
<b>Power</b>	On(Green)	The router is powered on and running normally.
<b>Power</b>	Off	The router is powered off.
<b>SYS</b>	Blinking(Green) on	The router is updating The router is running normally.
<b>ALM</b>		When the light is on, it indicates system applications occurred
Ethernet interface indicator	Blinking(Green) on	Have data transmission The system is not powered on or the network port is not connected to the network device
<b>Interface</b>		
<b>Page up</b>		can view info of FXS status.
<b>OK</b>		Use OK to return to the standby page
<b>RST</b>		Press it to restore factory settings above 5S
LAN		Connector for local network devices
WAN		Connector for accessing the internet
PHONE 1-16		Connect to the phone

**Table 3** FGW4148-16S Rear panel

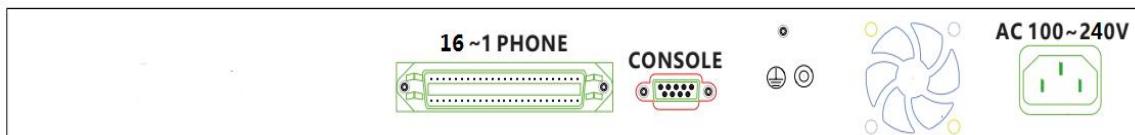


Interface	Description
16-1 PHONE	Transfer interface for 1-16 FXS
CONSOLE	Serial port, used to connect to your PC
Ground	Connect the ground wire
Fan	For equipment cooling

AC 100~220V      Connector for a power adapter.


## FGW4148-32S

**Table 4** FGW4148-32S Front panel

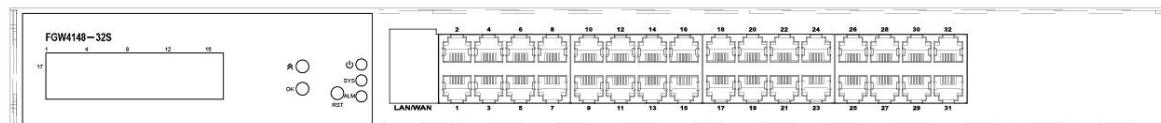

LED/Interface	Status	Description
<b>LED</b>		
LED Screen		The screen will appear the information about the device
	On(Green)	The router is powered on and running normally.
	Off	The router is powered off.
	Blinking(Green) on	The router is updating The router is running normally.
		When the light is on, it indicates system applications occurred
Ethernet interface indicator	Blinking(Green) on	Have data transmission The system is not powered on or the network port is not connected to the network device
<b>Interface</b>		
		Page up, can view info of FXS status.
		Use OK to return to the standby page
		Press it to restore factory settings above 5S
LAN		Connector for local network devices
WAN		Connector for accessing the internet
PHONE 1-16		Connect to the phone

**Table 5** FGW4148-32S Rear panel

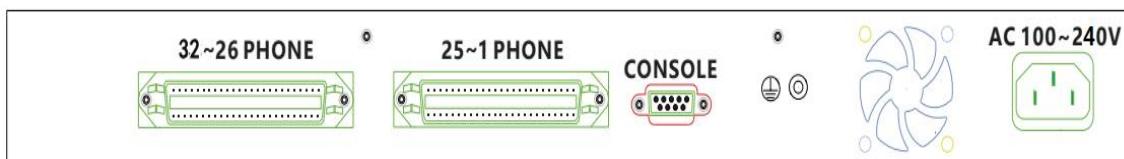


Interface	Description
32-26 PHONE	Transfer interface for 26-32 FXS
25-1 PHONE	Transfer interface for 1-25 FXS
CONSOLE	Serial port, used to connect to your PC

Ground	Connect the ground wire
Fan	For equipment cooling
AC 100~220V	Connector for a power adapter.


## FGW4148-48S

**Table 6** FGW4148-48S Front panel

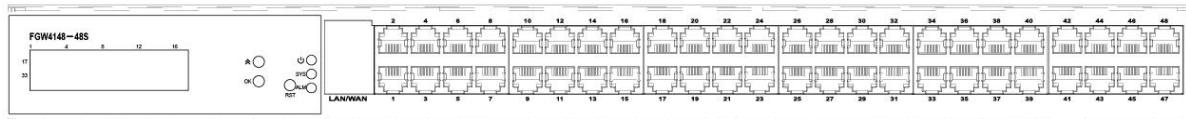

LED/Interface	Status	Description
<b>LED</b>		
LED Screen		The screen will appear the information about the device
	On(Green)	The router is powered on and running normally.
	Off	The router is powered off.
	Blinking(Green)	The router is updating
	on	The router is running normally.
		When the light is on, it indicates system applications occurred
Ethernet interface indicator	Blinking(Green)	Have data transmission
	on	The system is not powered on or the network port is not connected to the network device
<b>Interface</b>		
		Page up, can view info of FXS status.
		Use OK to return to the standby page
		Press it to restore factory settings above 5S
LAN		Connector for local network devices
WAN		Connector for accessing the internet
PHONE 1-16		Connect to the phone

**Table 7** FGW4148-48S Rear panel

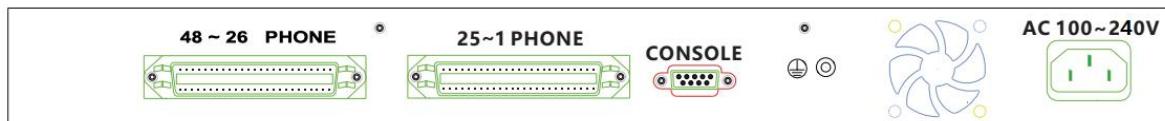

Interface	Description
48-26 PHONE	Transfer interface for 26-48 FXS
25-1 PHONE	Transfer interface for 1-25 FXS

---

CONSOLE	Serial port, used to connect to your PC
Ground	Connect the ground wire
Fan	For equipment cooling
AC 100~220V	Connector for a power adapter.

---

## Hardware Installation

---

Before configuring your router, please see the procedure below for instructions on connecting the device in your network.

### Procedure 1 Configuring the Router

1. Connect analog phone to ATA Port with an RJ11 cable.
2. Connect the WAN port to the Internet your network's modem/switch/router/ADSL equipment using an Ethernet cable.
3. Connect one end of the power cord to the power port of the device. Connect the other end to the wall outlet.
4. Check the Power, WAN, and LAN LED to confirm network connectivity.

---

#### Warning



Please do not attempt to use unsupported power adapters and do not remove power during configuring or updating the device. Using other power adapters may damage

FGW4148-16S/32S/48S and will void the manufacturer warranty.

---

---

**Warning**

Changes or modifications not expressly approved by the party responsible for compliance can void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency cause harmful interference to radio communications. However, there is no energy and, if not installed and used in accordance with the instructions, may guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

---

---

## Chapter 2 IVR Voice Prompt

---

This chapter contains:

- [Voice adapter Configuration Method \(IVR\)](#)
- [IVR description](#)

## Voice adapter Configuration Method (IVR)

The device can be configured in two ways, as follows:

- (1) Use IVR (Interactive Voice Response)
- (2) the use of web pages

This chapter mainly introduces how to configure the voice adapter through IVR.

### Start IVR

Users follow these steps to achieve IVR:

- (1) Go off-hook and press the "\*\*\*\*\*" key to start the IVR. Then the user will hear the voice prompt "1 WAN port configuration...".
- (2) According to different options, press any digit between 0 and 9, the device will broadcast the corresponding content, the numbers 0 to 9 represent the details as shown in the chart below.
- (3) After each setting is successful, the device will play "Please input option, 1 WAN port configuration...".




#### Note

Before using IVR, please confirm analog phone is connected with ATA correctly.

## IVR Description

The following chart lists the IVR requirements and a detailed description:

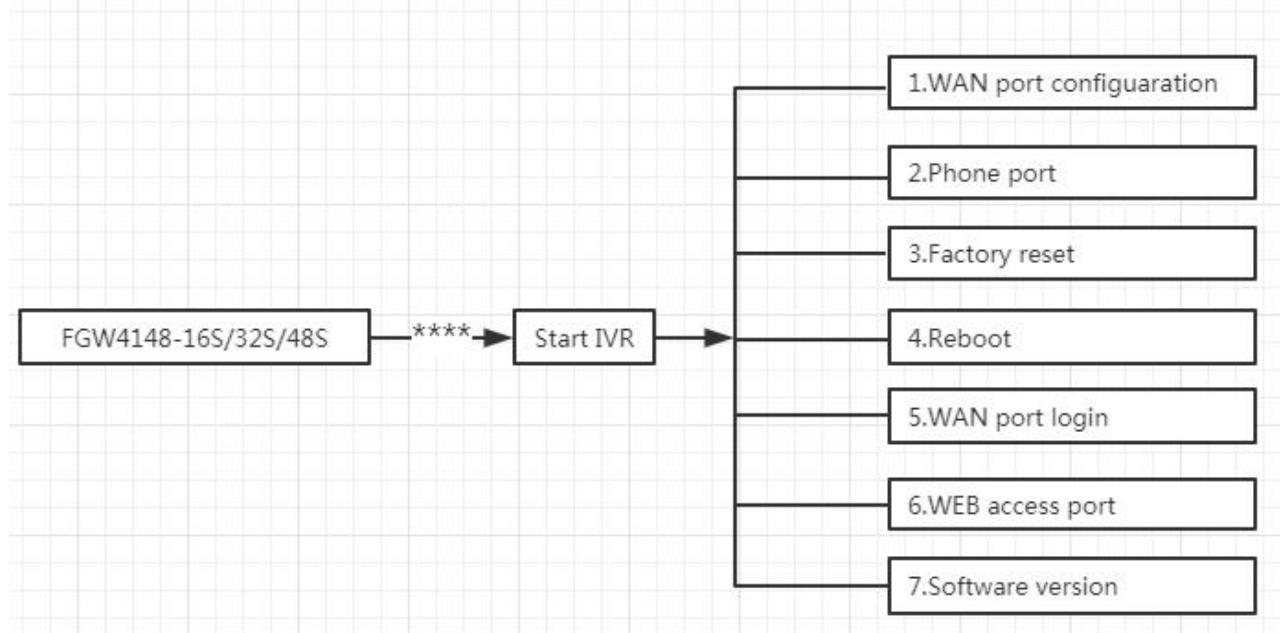

**Table 8** IVR Menu Setting Options

Operation code	Menu
<p>1 (1) WAN Port Configuration</p> <p>1</p> <p>2. Select "1", then the device will continue to broadcast to remind users to choose 1.WAN port connection type; 2.WAN port IP address; 3. WAN subnet mask; 4. adapter; 5. DNS</p> <p>3. Choose “1” , and The router reports the current WAN port connection type2)</p> <p>4. Prompt "Please enter password" , user needs to input password and press “#” key, if user wants to configuration WAN port connection type.</p> <p>The password in IVR is same as web management interface login, the user may use phone keypad to enter password directly</p> <p>For example: WEB login password is “admin” , so the password in IVR is “admin” . The user may “23646” to access and then configure the WAN connection port. The unit reports “Operation Successful” if the password is correct.</p> <p>5. Prompt "Please enter password" , user needs to input password and press “#” key if user wants to configuration WAN port connection type.</p> <p>6. Choose the new WAN port connection type (1) DHCP or (2) Static</p> <p>The unit reports “Operation Successful” if the changes are successful. The router returns to the prompt “please enter your option ...”</p> <p>7. To quit, enter “*”</p>	<p>1. Pick up phone and press “****” to start IVR</p>

<p>(2) WAN Port IP Address</p>	<ol style="list-style-type: none"> <li>1. Pick up phone and press “****” to start IVR</li> <li>2. Choose “2”, and The router reports current WAN Port IP Address</li> <li>3. Input the new WAN port IP address and press “#” key:</li> <li>4. Use “*” to replace “.”, for example user can input 192*168*20*168 to set the new IP address 192.168.20.168</li> <li>5. Press # key to indicate that you have finished</li> <li>6. Report “operation successful” if user operation is ok.</li> <li>7. To quit, enter “**”.</li> </ol>
<p>(3) WAN Port Subnet Mask</p>	<ol style="list-style-type: none"> <li>1. Pick up phone and press “****” to start IVR</li> <li>2. Choose “3”, and router reports current WAN port subnet mask</li> <li>3. Input a new WAN port subnet mask and press # key:</li> <li>4. Use “*” to replace “.”, user can input 255*255*255*0 to set the new WAN port subnet mask 255.255.255.0</li> <li>5. Press “#” key to indicate that you have finished</li> <li>6. Report “operation successful” if user operation is ok.</li> <li>7. To quit, enter “**”.</li> </ol>
<p>(4) adapter</p>	<ol style="list-style-type: none"> <li>1. Pick up phone and press “****” to start IVR</li> <li>2. Choose “4”, and the router reports current adapter</li> <li>3. Input the new adapter and press “#” key:</li> <li>4. Use “*” to replace “.”, user can input 192*168*20*1 to set the new adapter 192.168.20.1.</li> <li>5. Press “#” key to indicate that you have finished.</li> <li>6. Report “operation successful” if user operation is ok.</li> <li>7. To quit, press “**”.</li> </ol>

(5) DNS	<ol style="list-style-type: none"> <li>1. Pick up phone and press “****” to start IVR</li> <li>2. Choose “5”, and the router reports current DNS</li> <li>3. Input the new DNS and press # key:</li> <li>4. Use “*” to replace “.”, user can input 192*168*20*1 to set the new adapter 192.168.20.1.</li> <li>5. Press “#” key to indicate that you have finished.</li> </ol>
2 phone port configuration	<ol style="list-style-type: none"> <li>1. Pick up phone and press “****” to start IVR</li> <li>2. Select "2", then the device will continue to broadcast prompts the user to select current phone number; 2. registration server address; 3. registration port; 4. call forwarding configuration, 5. DNS configuration ;</li> <li>3. Continue pressing "1" and the unit will continue to broadcast the phone number of the current phone port. The device will then broadcast "1. Phone number ..." again.</li> </ol>
3 Factory Reset	<ol style="list-style-type: none"> <li>1. Pick up phone and press “****” to start IVR</li> <li>2. Choose “6”, and the router reports “Factory Reset”</li> <li>3. Prompt "Please enter password", the method of inputting password is the same as operation 1.</li> <li>4. If you want to quit, press “*” .</li> <li>5. Prompt “operation successful” if password is right and then the router will be</li> </ol>
4 Reboot	<ol style="list-style-type: none"> <li>1. Pick up phone and press “****” to start IVR</li> <li>2. Choose “7”, and the router reports “Reboot”</li> <li>3. Prompt "Please enter password", the method of inputting password is same as operation 1.</li> <li>4. the router reboots if password is right and operation</li> </ol>

	<ol style="list-style-type: none"><li>1. Pick up phone and press “****” to start IVR</li></ol>
5 WAN Port Login	<ol style="list-style-type: none"><li>2. Choose “8”, and the router reports “WAN Port Login”</li><li>3. Prompt “Please enter password”, the method of inputting password is same as operation 1.</li><li>4. If user wants to quit, press “*”.</li></ol>
6 WEB Access Port	<ol style="list-style-type: none"><li>1. Pick up phone and press “****” to start IVR</li><li>2. Choose “9”, and the router reports “WEB Access Port”</li><li>3. Prompt “Please enter password”, the method of inputting password is same as operation 1.</li><li>4. Report “operation successful” if user operation is ok.</li></ol>
7 Firmware Version	<ol style="list-style-type: none"><li>1. Pick up phone and press “****” to start IVR</li><li>2. Choose “0” and the router reports the current Firmware version</li></ol>

**Note**

1. While using Voice menu, press \* (star) to return to main menu.
2. If any changes made in the IP assignment mode, the router must be rebooted in order for the settings to take effect.
3. While entering an IP address or subnet mask, use "\*" (star) to enter "." (Dot) and use "#" (hash) key to finish entering IP address or subnet mask:
4. For example, to enter the IP address 192.168.20.159 by keypad, press these keys:  
192\*168\*20\*159, use the #(hash) key to indicate that you have finished entering the IP address.
5. Use the # (hash) key to indicate that you have finish entering the IP address or subnet mask
6. While assigning an IP address in Static IP mode, setting the IP address, subnet mask and default adapter is required to complete the configuration. If in DHCP mode, please make sure that a DHCP server is available in your existing broadband connection to which WAN port of FGW4148-16S/32S/48S is connected.
7. The default LAN port IP address of FGW4148-16S/32S/48S is 192.168.11.1 and this address should not be assigned to the WAN port IP address of FGW4148-16S/32S/48S in the same network segment of LAN port.
8. The password can be entered using phone keypad, the mapping table between number and letters as follows:
  - To input: D, E, F, d, e, f -- press '3'
  - To input: G, H, I, g, h, i -- press '4'
  - To input: J, K, L, j, k, l -- press '5'
  - To input: M, N, O, m, n, o -- press '6'
  - To input: P, Q, R, S, p, q, r, s -- press '7'
  - To input: T, U, V, t, u, v -- press '8'
  - To input: W, X, Y, Z, w, x, y, z -- press '9'
  - To input all other characters in the administrator password----press '0' .

---

# Chapter 3 Basic Settings

---

This chapter covers:

- [WEB Page](#)
- [SIP Account Register](#)
- [Basic Function](#)

# WEB Page

## About Password

Our device supports two levels of management: administrators and users.

- (1) Administrator mode can browse and set all configuration parameters.
- (2) User mode can set all configuration parameters except SIP1/2 that some parameters can not be changed, such as server address and port.

- Default user with administrator mode: Username: admin, Password: admin
- Default user with user mode: Username: admin, Password: user

## URL Format

FGW4148-16S/32S/48S has a built-in web server in response to HTTP get / post requests. Users can use a web browser, such as Microsoft's IE, to log in to the FGW4148-16S/32S/48S page and configure the FGW4148-16S/32S/48S

### LAN port Login

1. Ensure your PC is connected to the router's LAN port correctly.



#### Note

You may either set up your PC to get an IP dynamically from the router or set up the IP address of the PC to be the same subnet as the default IP address of router is 192.168.1.1.  
For detailed information, see Chapter 5: Troubleshooting Guide.

2. Open a web browser on your PC and input "http://192.168.1.1".

3. The following window appears and prompts for username, password.



4. For administrator mode operation, please type admin/admin on Username/Password and click Login to begin configuration.

5. For user mode operation, please type user/user on Username/Password and click Login to begin configuration.

---

**Note**

If you are unable to access the web configuration, please see Chapter 5: Troubleshooting Guide for more information.

---

6.The web management interface automatically logs out the user after 5 minutes of inactivity.

**WAN port Login**

1. Ensure your PC is connected to the router's WAN port correctly.
2. Obtain the IP addresses of WAN port using Voice prompt or by logging into the device web management interface via a LAN port and navigating to Network > WAN.
3. Open a web browser on your PC and input <http://<IP address of WAN port>>. The following login page will be opened to enter username and password.



4. For administrator mode operation, type admin/admin on Username/Password and click Login to begin configuration.

5. For user mode operation, type user/user on Username/Password and click Login to begin configuration.

---

**Note**


If you fail to access to the web configuration, see Chapter 6: Troubleshooting Guide for more information.

---

6.The web management interface automatically logs out the user after 5 minutes of inactivity.

## WEB Interface Introduction

**Table 9** WEB Interface Introduction

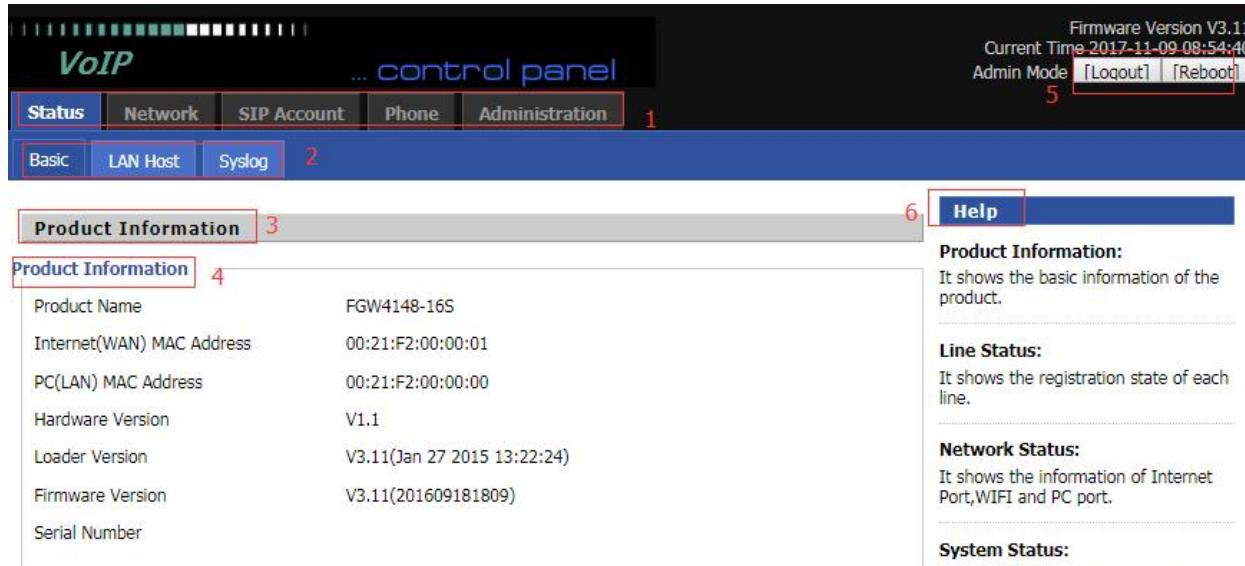

Serial number	Name	Description
Position 1	navigation bar	Click navigation bar, many sub-navigation bar will appear in the place 2
Position 2	sub-navigation bar	Click sub-navigation bar to enter to configuration page
Position 3	configuration title	The configuration title
Position 4	configuration bars	The configuration bars
Position 5	main information	Display the firmware version, DSP version, Current Time, and user can change login level (mode) to return to login page by press blue Switch button.
Position 6	Help	Display the main information for configuration; user can get help from it directly.
	<b>Save</b>	After changing the parameters, you need to click this button to save. After you click Save, there is a need to restart the device.
	<b>Cancel</b>	Click to cancel the change
	<b>Reboot</b>	Click to restart
	<b>Refresh</b>	Refresh current page

# SIP Account Register

FGW4148-16S/32S/48S have 16/32/48 Lines to make SIP (Session Initiation Protocol) calls. Before registering, the device user should have SIP accounts configured by the system administrator or provider. See the section below for more information.

## Register one by one

**Table 10** Config SIP the Web Management Interface

Status	Network	SIP Account	Phone	Administration
Account	FXS Settings	SIP Settings	VoIP QoS	
Port	FXS 1 ▼	Batch Settings	<input type="checkbox"/>	
<b>Basic</b>				
<b>Basic Setup</b>				
Port Enable	Enable ▼	Outgoing Call without Registration	Disable ▼	
<b>Proxy and Registration</b>				
Proxy Server	192.168.10.88	Proxy Port	5060	
Outbound Server		Outbound Port	5060	
Backup Outbound Server		Backup Outbound Port	5060	
<b>Subscriber Information</b>				
Display Name	601	Phone Number	601	
Account	601	Password	*****	

### Steps:

- Step 1. The account enable is set to "On" and the line can be used after opening.
- Step 2. The registration server fills in the IP address of the SIP server.
- Step 3. Display Name Fill in the content is the name of the number displayed on the LCD.
- Step 4. The registration account is filled with the account provided by the SIP server.
- Step 5. The name of the authentication is the SIP account provided by the SIP server.
- Step 6. The password is filled with the password provided by the SIP server registration account.
- Step 7. When you are finished, click the Save button at the bottom of the page to make the configuration take effect.
- Step 8. Check the registration of the corresponding line on the display / web status page.



### Notes

**Step 3-9 is to fill in the required content, other parameters fill in the required**

## Procedure

To view the SIP account status of device, open the **Status** web page and view the value of registration status.

## Batch Registration

There are many FXS ports on the FGW4148-16S / 32S / 48S. One by one, configuration is very troublesome. Therefore, we support batch configuration of SIP accounts.

Taking FGW4148-16S as an example, batch configuration of SIP account steps:

1. Log in to the web page, switch to the **SIP Account - FXS Settings** page, check the "**Batch Settings**", and select

the need to set the batch FXS port.

2. Fill in the "Proxy Server", other parameters on request.

The screenshot shows the 'SIP Account' tab selected in the top navigation bar. Under the 'FXS Settings' sub-tab, the 'Batch Settings' checkbox is checked and highlighted with a red box. The 'Start Port' dropdown is set to 'FXS 1' and the 'End Port' dropdown is set to 'FXS 16'. Below this, the 'Basic' section is expanded, showing 'Port Enable' set to 'Enable' and 'Outgoing Call without Registration' set to 'Disable'. The 'Proxy and Registration' section is also expanded, showing 'Proxy Server' set to '192.168.10.88' and other fields for Outbound and Backup Outbound servers and ports.

3. Switch to **SIP Account - Account** page, fill in the batch configuration of FXS port account as required.

Status	Network	SIP Account	Phone	Administration	
Account	FXS Settings	SIP Settings	VoIP QoS		
Account					
Port	Display Name	Phone Number	Account	Password	Enable
FXS 1	601	601	601	*****	<input checked="" type="checkbox"/>
FXS 2	602	602	602	*****	<input checked="" type="checkbox"/>
FXS 3	603	603	603	****	<input checked="" type="checkbox"/>
FXS 4					<input type="checkbox"/>
FXS 5					<input type="checkbox"/>
FXS 6					<input type="checkbox"/>

4. Click "Save" button

5. Status page can view the registration status information.

## Basic Function

---

### Calling phone or extension numbers

To make a phone or extension number call:

- Both ATA and the other VoIP device (i.e., another ATA or other SIP products) must have public IP addresses, or
- Both ATA and the other VoIP device (i.e., another ATA or other SIP products) are on the same LAN using private or public IP addresses, or
- Both ATA and the other VoIP device (i.e., another ATA or other SIP products) can be connected through a router using a public or private IP addresses.

To make a call, first pick up the analog phone or turn on the speakerphone on the analog phone, input the IP address directly, end with #.

### Direct IP calls

Direct IP calling allows two phones, that is, an ATA with an analog phone and another VoIP Device, to talk to each other without a SIP proxy. VoIP calls can be made between two phones if:

- Both ATA and the other VoIP device (i.e., another ATA or other SIP products) have public IP addresses, or
- Both ATA and the other VoIP device (i.e., another ATA or other SIP products) are on the same LAN

- using private or public IP addresses, or
- Both ATA and the other VoIP device (i.e., another ATA or other SIP products) can be connected through a router using public or private IP addresses.

To make a direct IP call, first pick up the analog phone or turn on the speakerphone on the analog phone, Input the IP address directly, with the end “#” .

## Call Hold

Method 1: While in conversation, pressing the “\*77” to put the remote end on hold, then you will hear the dial tone and the remote party will hear hold tone at the same time.

Pressing the “\*77” again to release the previously hold state and resume the bi-directional media.

Method 2: While in conversation, pressing the Flash key to put the remote end on hold, then you will hear the dial tone and the remote party will hear hold tone at the same time.

Pressing the Flash key again to release the previously hold state and resume the bi-directional media.

## Call transfer

### 1. Blind Transfer

Assume that call party A and party B are in conversation. Party A wants to Blind Transfer B to C:

Method 1: Party A dials “\*98” to get a dial tone, then dials party C’s number, and then press immediately key # (or wait for 4 seconds) to dial out. A can hang up.

Method 2: Party A pressed the Flash key to get a dial tone, then dials party C’s number, and then press immediately key # (or wait for 4 seconds) to dial out. A can hang up. C answers the call and talks to B.

When enabled R key and Flash as R key function, you can refer to the steps below to transfer:

Party A pressed the Flash key and number 4 key to get a dial tone, then dials party C’s number, and then press immediately key # (or wait for 4 seconds) to dial out. A can hang up. C answers the call and talks to B.

### 2. Attended Transfer

Assume that call party A and B are in a conversation. A wants to Attend Transfer B to C:

Method 1: Party A dials “\*77” to hold the party B, when hear the dial tone, A dials C’s number, then party A and party C are in conversation.

Party A dials “\*98” to transfer to C, then B and C now in conversation.

If the transfer is not completed successfully, then A and B are in conversation again.

Method 2: Party A presses the Flash key to hold the party B, when hear the dial tone, A dials C’s

number, then party A and party C are in conversation. Party A hang up, then B and C now in conversation.

## Conference

Assume that call party A and B are in a conversation. A wants to add C to the conference:


Method 1: Party A dials “\*77” to hold the party B, when hear the dial tone, A dial C’s number, then party A and party C are in conversation.

Party A dials “\*88” to add C, then A and B, for conference.

Method 2: Party A pressed Flash key to hold the party B, when hear the dial tone, A dial C’s number, then party A and party C are in conversation.

Party A pressed Flash key again, then A , B and C are in the same conversation.

Note: If this method is not working, please enable Bellcore Style 3-Way Conference option on the web interface.

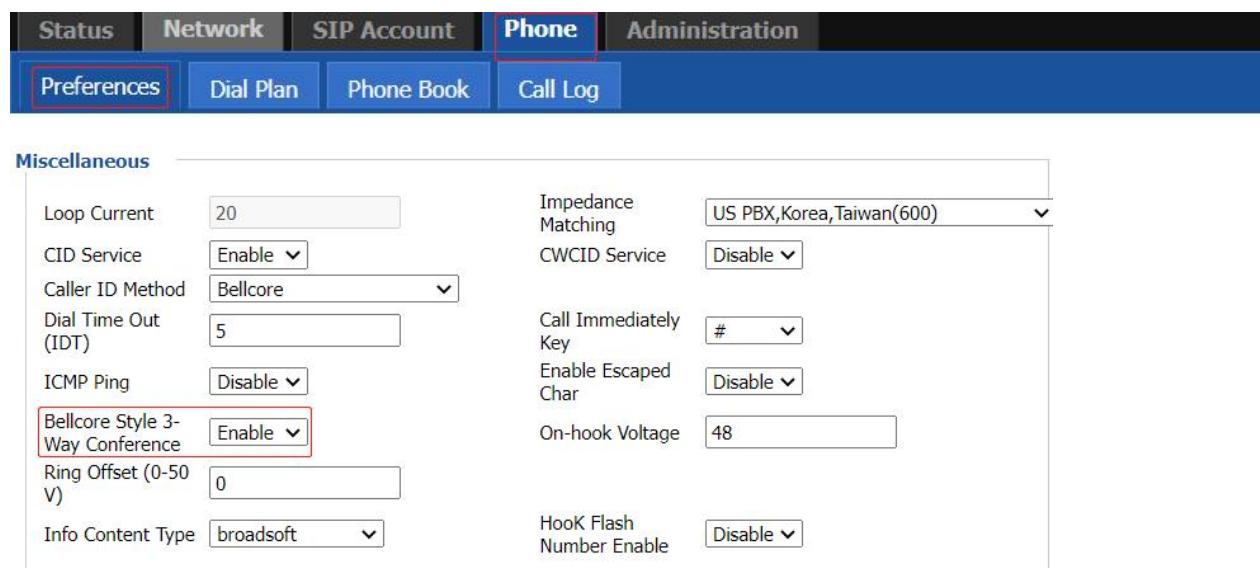

The screenshot shows a web-based configuration interface for a phone. The top navigation bar includes tabs for Status, Network, SIP Account, Phone, and Administration. The Phone tab is currently selected. Below the navigation bar, there are sub-tabs: Preferences (which is highlighted with a red box), Dial Plan, Phone Book, and Call Log. The main content area is titled 'Miscellaneous' and contains various configuration options:

Loop Current	20	Impedance Matching	US PBX,Korea,Taiwan(600)
CID Service	Enable	CWCID Service	Disable
Caller ID Method	Bellcore	Call Immediately Key	#
Dial Time Out (IDT)	5	Enable Escaped Char	Disable
ICMP Ping	Disable	On-hook Voltage	48
Bellcore Style 3-Way Conference	Enable	Hook Flash Number Enable	Disable
Ring Offset (0-50 V)	0		
Info Content Type	broadsoft		

---

# Chapter 4 Web Interface

---

This chapter guides users to execute advanced (full) configuration through admin mode operation. This chapter covers:

- [Login](#)
- [Status](#)
- [Network](#)
- [SIP Account](#)
- [Phone](#)
- [Administration](#)

# Login

---

**Table 11** Login details**Procedure**

1. Connect the LAN port of the router to your PC an Ethernet cable
2. Open a web browser on your PC and type <http://192.168.1.1>.
3. Enter Username admin and Password admin.
4. Click Login

# Status

---

This webpage shows the status information about the Product, Network, SIP Account Status, FXS Port Status, Network Status, Wireless Info and System Status

The screenshot shows the 'Status' tab selected in the top navigation bar. Below it, a sub-navigation bar includes 'Basic', 'LAN Host', and 'Syslog'. The main content area is titled 'Product Information' and lists the following details:

Product Name	FGW4148-16S
Internet(WAN) MAC Address	00:21:F2:00:00:01
PC(LAN) MAC Address	00:21:F2:00:00:00
Hardware Version	V1.1
Loader Version	V3.11(Jan 27 2015 13:22:24)
Firmware Version	V3.11(201609181809)
Serial Number	

Below this is a 'Line Status' section with the following data:

Line 1 Status	Registered 601
Primary Server	192.168.10.88
Backup Server	192.168.10.88

# Network

---

You can configure the WAN port, LAN port, DDNS, Multi WAN, DMZ, MAC Clone, Port Forward and other parameters in this section of the web management interface.

## WAN

This page allows you to set WAN configuration with different modes. Use the Connection Type drop down list to choose one WAN mode and then the corresponding page will be displayed.

### 1. Static IP

This configuration may be utilized when a user receives a fixed public IP address or a public subnet,

namely multiple public IP addresses from the Internet providers. In most cases, a Cable service provider will offer a fixed public IP, while a DSL service provider will offer a public subnet. If you have a public subnet, you can assign an IP address to the WAN interface.

**Table 12** Static IP

Status	Network	SIP Account	Phone	Administration																																																																									
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing																																																																							
<b>INTERNET</b>																																																																													
<b>WAN</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Connect Name</td> <td>1_MANAGEMENT_VOICE_INTERNET_R_VID</td> <td><input type="button" value="Delete Connect"/></td> </tr> <tr> <td>Service</td> <td>MANAGEMENT_VOICE_INTERNET</td> <td></td> </tr> <tr> <td>IP Protocol Version</td> <td>IPv4</td> <td></td> </tr> <tr> <td>WAN IP Mode</td> <td>Static</td> <td></td> </tr> <tr> <td>NAT Enable</td> <td>Enable</td> <td></td> </tr> <tr> <td>VLAN Mode</td> <td>Disable</td> <td></td> </tr> <tr> <td>VLAN ID</td> <td>1 (1-4094)</td> <td></td> </tr> <tr> <td>Static</td> <td colspan="2"></td> </tr> <tr> <td>IP Address</td> <td colspan="2">192.168.10.247</td> </tr> <tr> <td>Subnet Mask</td> <td colspan="2">255.255.255.0</td> </tr> <tr> <td>Default Gateway</td> <td colspan="2">192.168.10.1</td> </tr> <tr> <td>DNS Mode</td> <td colspan="2">Manual</td> </tr> <tr> <td>Primary DNS</td> <td colspan="2">192.168.10.1</td> </tr> <tr> <td>Secondary DNS</td> <td colspan="2">192.168.18.1</td> </tr> <tr> <td>Port Bind</td> <td colspan="2"></td> </tr> <tr> <td><input checked="" type="checkbox"/> Port_1</td> <td colspan="2"></td> </tr> <tr> <td colspan="3">Note : WAN connection can not be shared between the binding port , and finally bound port WAN connections bind operation will wash away before the other WAN connection to the port binding operation !</td> </tr> <tr> <td colspan="7"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th>Field Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>IP Address</td> <td>The IP address of Internet port</td> </tr> <tr> <td>Subnet Mask</td> <td>The subnet mask of Internet port</td> </tr> <tr> <td>Default adapter</td> <td>The default adapter of Internet port</td> </tr> <tr> <td colspan="2" style="text-align: center;">Select DNS mode, options are Auto and Manual:</td> </tr> <tr> <td>DNS Mode</td> <td colspan="2"> <ol style="list-style-type: none"> <li>1. When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.</li> <li>2. When DNS mode is Manual, the user manually configures the preferred DNS and alternate DNS information</li> </ol> </td> </tr> </tbody> </table> </td> </tr> </table>							Connect Name	1_MANAGEMENT_VOICE_INTERNET_R_VID	<input type="button" value="Delete Connect"/>	Service	MANAGEMENT_VOICE_INTERNET		IP Protocol Version	IPv4		WAN IP Mode	Static		NAT Enable	Enable		VLAN Mode	Disable		VLAN ID	1 (1-4094)		Static			IP Address	192.168.10.247		Subnet Mask	255.255.255.0		Default Gateway	192.168.10.1		DNS Mode	Manual		Primary DNS	192.168.10.1		Secondary DNS	192.168.18.1		Port Bind			<input checked="" type="checkbox"/> Port_1			Note : WAN connection can not be shared between the binding port , and finally bound port WAN connections bind operation will wash away before the other WAN connection to the port binding operation !			<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th>Field Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>IP Address</td> <td>The IP address of Internet port</td> </tr> <tr> <td>Subnet Mask</td> <td>The subnet mask of Internet port</td> </tr> <tr> <td>Default adapter</td> <td>The default adapter of Internet port</td> </tr> <tr> <td colspan="2" style="text-align: center;">Select DNS mode, options are Auto and Manual:</td> </tr> <tr> <td>DNS Mode</td> <td colspan="2"> <ol style="list-style-type: none"> <li>1. When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.</li> <li>2. When DNS mode is Manual, the user manually configures the preferred DNS and alternate DNS information</li> </ol> </td> </tr> </tbody> </table>							Field Name	Description	IP Address	The IP address of Internet port	Subnet Mask	The subnet mask of Internet port	Default adapter	The default adapter of Internet port	Select DNS mode, options are Auto and Manual:		DNS Mode	<ol style="list-style-type: none"> <li>1. When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.</li> <li>2. When DNS mode is Manual, the user manually configures the preferred DNS and alternate DNS information</li> </ol>	
Connect Name	1_MANAGEMENT_VOICE_INTERNET_R_VID	<input type="button" value="Delete Connect"/>																																																																											
Service	MANAGEMENT_VOICE_INTERNET																																																																												
IP Protocol Version	IPv4																																																																												
WAN IP Mode	Static																																																																												
NAT Enable	Enable																																																																												
VLAN Mode	Disable																																																																												
VLAN ID	1 (1-4094)																																																																												
Static																																																																													
IP Address	192.168.10.247																																																																												
Subnet Mask	255.255.255.0																																																																												
Default Gateway	192.168.10.1																																																																												
DNS Mode	Manual																																																																												
Primary DNS	192.168.10.1																																																																												
Secondary DNS	192.168.18.1																																																																												
Port Bind																																																																													
<input checked="" type="checkbox"/> Port_1																																																																													
Note : WAN connection can not be shared between the binding port , and finally bound port WAN connections bind operation will wash away before the other WAN connection to the port binding operation !																																																																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th>Field Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>IP Address</td> <td>The IP address of Internet port</td> </tr> <tr> <td>Subnet Mask</td> <td>The subnet mask of Internet port</td> </tr> <tr> <td>Default adapter</td> <td>The default adapter of Internet port</td> </tr> <tr> <td colspan="2" style="text-align: center;">Select DNS mode, options are Auto and Manual:</td> </tr> <tr> <td>DNS Mode</td> <td colspan="2"> <ol style="list-style-type: none"> <li>1. When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.</li> <li>2. When DNS mode is Manual, the user manually configures the preferred DNS and alternate DNS information</li> </ol> </td> </tr> </tbody> </table>							Field Name	Description	IP Address	The IP address of Internet port	Subnet Mask	The subnet mask of Internet port	Default adapter	The default adapter of Internet port	Select DNS mode, options are Auto and Manual:		DNS Mode	<ol style="list-style-type: none"> <li>1. When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.</li> <li>2. When DNS mode is Manual, the user manually configures the preferred DNS and alternate DNS information</li> </ol>																																																											
Field Name	Description																																																																												
IP Address	The IP address of Internet port																																																																												
Subnet Mask	The subnet mask of Internet port																																																																												
Default adapter	The default adapter of Internet port																																																																												
Select DNS mode, options are Auto and Manual:																																																																													
DNS Mode	<ol style="list-style-type: none"> <li>1. When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.</li> <li>2. When DNS mode is Manual, the user manually configures the preferred DNS and alternate DNS information</li> </ol>																																																																												

Primary DNS Address	The primary DNS of Internet port
Secondary DNS Address	The secondary DNS of Internet port

## 2.DHCP

The Router has a built-in DHCP server that assigns private IP address to each local client.

The DHCP feature allows the router to obtain an IP address automatically from a DHCP server. In this case, it is not necessary to assign an IP address to the client manually.

**Table 13** DHCP

Status	Network	SIP Account	Phone	Administration																																																					
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing																																																			
<b>INTERNET</b>																																																									
<b>WAN</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Connect Name</td> <td>1_MANAGEMENT_VOICE_INTERNET_R_VID</td> <td><input type="button" value="Delete Connect"/></td> </tr> <tr> <td>Service</td> <td>MANAGEMENT_VOICE_INTERNET</td> <td></td> </tr> <tr> <td>IP Protocol Version</td> <td>IPv4</td> <td></td> </tr> <tr> <td>WAN IP Mode</td> <td>DHCP</td> <td></td> </tr> <tr> <td>DHCP Server</td> <td colspan="2"></td> </tr> <tr> <td>NAT Enable</td> <td>Enable</td> <td></td> </tr> <tr> <td>VLAN Mode</td> <td>Disable</td> <td></td> </tr> <tr> <td>VLAN ID</td> <td>1</td> <td>(1-4094)</td> </tr> <tr> <td>DNS Mode</td> <td>Manual</td> <td></td> </tr> <tr> <td>Primary DNS</td> <td colspan="2"></td> </tr> <tr> <td>Secondary DNS</td> <td colspan="2"></td> </tr> <tr> <td colspan="3"><b>DHCP</b></td> </tr> <tr> <td>DHCP Renew</td> <td colspan="2"><input type="button" value="Renew"/></td> </tr> <tr> <td>DHCP Vendor(Option 60)</td> <td colspan="2">FLYINGVOICE-FGW4148-1</td> </tr> <tr> <td>Port Bind</td> <td colspan="2"></td> </tr> <tr> <td><input checked="" type="checkbox"/> Port_1</td> <td colspan="2"></td> </tr> <tr> <td colspan="3">           Note : WAN connection can not be shared between the binding port , and finally bound port WAN connections bind operation will wash away before the other WAN connection to the port binding operation !         </td> </tr> </table>							Connect Name	1_MANAGEMENT_VOICE_INTERNET_R_VID	<input type="button" value="Delete Connect"/>	Service	MANAGEMENT_VOICE_INTERNET		IP Protocol Version	IPv4		WAN IP Mode	DHCP		DHCP Server			NAT Enable	Enable		VLAN Mode	Disable		VLAN ID	1	(1-4094)	DNS Mode	Manual		Primary DNS			Secondary DNS			<b>DHCP</b>			DHCP Renew	<input type="button" value="Renew"/>		DHCP Vendor(Option 60)	FLYINGVOICE-FGW4148-1		Port Bind			<input checked="" type="checkbox"/> Port_1			Note : WAN connection can not be shared between the binding port , and finally bound port WAN connections bind operation will wash away before the other WAN connection to the port binding operation !		
Connect Name	1_MANAGEMENT_VOICE_INTERNET_R_VID	<input type="button" value="Delete Connect"/>																																																							
Service	MANAGEMENT_VOICE_INTERNET																																																								
IP Protocol Version	IPv4																																																								
WAN IP Mode	DHCP																																																								
DHCP Server																																																									
NAT Enable	Enable																																																								
VLAN Mode	Disable																																																								
VLAN ID	1	(1-4094)																																																							
DNS Mode	Manual																																																								
Primary DNS																																																									
Secondary DNS																																																									
<b>DHCP</b>																																																									
DHCP Renew	<input type="button" value="Renew"/>																																																								
DHCP Vendor(Option 60)	FLYINGVOICE-FGW4148-1																																																								
Port Bind																																																									
<input checked="" type="checkbox"/> Port_1																																																									
Note : WAN connection can not be shared between the binding port , and finally bound port WAN connections bind operation will wash away before the other WAN connection to the port binding operation !																																																									

Field Name	Description
	Select DNS mode, options are Auto and Manual:
DNS Mode	When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.
	When DNS mode is Manual, the user should manually configure the preferred

Primary DNS Address	Primary DNS of Internet port.
Secondary DNS Address	Secondary DNS of Internet port.
DHCP Renew	Refresh the DHCP IP address
DHCP Vendor (Option60)	Specify the DHCP Vendor field. Display the vendor and product name.

### 3. PPPoE

PPPoE stands for Point-to-Point Protocol over Ethernet. It relies on two widely accepted standards: PPP and Ethernet. It connects users through an Ethernet to the Internet with a common broadband medium, such as a single DSL line, wireless device or cable modem. All the users over the Ethernet can share a common connection. PPPoE is used for most of DSL modem users. All local users can share one PPPoE connection for accessing the Internet. Your service provider will provide you information about user name, password, and authentication mode.

**Table 14** PPPoE

Status	Network	SIP Account	Phone	Administration																																																																										
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing																																																																								
<b>INTERNET</b>																																																																														
<b>WAN</b> <table> <tr> <td>Connect Name</td> <td>1_MANAGEMENT_VOICE_INTERNET_R_VID</td> <td>Delete</td> <td>Connect</td> </tr> <tr> <td>Service</td> <td>MANAGEMENT_VOICE_INTERNET</td> <td colspan="2"></td> </tr> <tr> <td>IP Protocol Version</td> <td>IPv4</td> <td colspan="2"></td> </tr> <tr> <td>WAN IP Mode</td> <td>PPPoE</td> <td colspan="2"></td> </tr> <tr> <td>NAT Enable</td> <td>Enable</td> <td colspan="2"></td> </tr> <tr> <td>VLAN Mode</td> <td>Disable</td> <td colspan="2"></td> </tr> <tr> <td>VLAN ID</td> <td>1 (1-4094)</td> <td colspan="2"></td> </tr> <tr> <td>DNS Mode</td> <td>Auto</td> <td colspan="2"></td> </tr> <tr> <td>Primary DNS</td> <td colspan="3"></td> </tr> <tr> <td>Secondary DNS</td> <td colspan="3"></td> </tr> <tr> <td>PPPoE</td> <td colspan="3"></td> </tr> <tr> <td>PPPoE Account</td> <td colspan="3"></td> </tr> <tr> <td>PPPoE Password</td> <td colspan="3">*****</td> </tr> <tr> <td>Confirm Password</td> <td colspan="3">*****</td> </tr> <tr> <td>Service Name</td> <td colspan="3"></td> </tr> <tr> <td colspan="4">Leave empty to autodetect</td> </tr> <tr> <td>Operation Mode</td> <td>Keep Alive</td> <td colspan="2"></td> </tr> <tr> <td>Keep Alive Redial Period(0-3600s)</td> <td>5</td> <td colspan="2"></td> </tr> </table>							Connect Name	1_MANAGEMENT_VOICE_INTERNET_R_VID	Delete	Connect	Service	MANAGEMENT_VOICE_INTERNET			IP Protocol Version	IPv4			WAN IP Mode	PPPoE			NAT Enable	Enable			VLAN Mode	Disable			VLAN ID	1 (1-4094)			DNS Mode	Auto			Primary DNS				Secondary DNS				PPPoE				PPPoE Account				PPPoE Password	*****			Confirm Password	*****			Service Name				Leave empty to autodetect				Operation Mode	Keep Alive			Keep Alive Redial Period(0-3600s)	5		
Connect Name	1_MANAGEMENT_VOICE_INTERNET_R_VID	Delete	Connect																																																																											
Service	MANAGEMENT_VOICE_INTERNET																																																																													
IP Protocol Version	IPv4																																																																													
WAN IP Mode	PPPoE																																																																													
NAT Enable	Enable																																																																													
VLAN Mode	Disable																																																																													
VLAN ID	1 (1-4094)																																																																													
DNS Mode	Auto																																																																													
Primary DNS																																																																														
Secondary DNS																																																																														
PPPoE																																																																														
PPPoE Account																																																																														
PPPoE Password	*****																																																																													
Confirm Password	*****																																																																													
Service Name																																																																														
Leave empty to autodetect																																																																														
Operation Mode	Keep Alive																																																																													
Keep Alive Redial Period(0-3600s)	5																																																																													

Field Name	Description
PPPoE Account	Enter a valid user name provided by the ISP
PPPoE Password	Enter a valid password provided by the ISP. The password can contain special characters and allowed special characters are \$, +, *, #, @ and ! For example, the password can be entered as #net123@IT!\$+*.
Confirm Password	Enter your PPPoE password again
Service Name	Enter a service name for PPPoE authentication.  If it is left empty, the service name is auto detected.
Operation Mode	Select the mode of operation, options are Keep Alive, On Demand and Manual:  When the mode is Keep Alive, the user sets the 'keep alive redial period' values range from 0 to 3600s, the default setting is 5 minutes;  When the mode is On Demand, the user sets the 'on demand idle time' value in the range of 0-60 minutes, the default setting is 5 minutes;
<div style="display: flex; justify-content: space-between;"> <div>Operation Mode</div> <div> <input style="border: 1px solid black; padding: 2px 10px; border-radius: 5px; margin-right: 10px;" type="button" value="On Demand"/> <input style="border: 1px solid black; padding: 2px 10px; border-radius: 5px;" type="button" value="Keep Alive"/> </div> <div>On Demand Idle Time(0-60m)</div> <div style="border: 1px solid black; padding: 2px 10px; border-radius: 5px; width: 50px; margin-left: 10px;">5</div> </div>	
Keep Alive Redial Period	Set the interval to send Keep Alive messaging
PPPoE Account	Assign a valid user name provided by the ISP

## 4.Bridge Mode

Bridge Mode under Multi WAN is different with traditional bridge setting. Bridge mode employs no IP addressing and the device operates as a bridge between the WAN port and the LAN port. Route Connection has to be built to give IP address to local service on device.

**Table 15** Bridge Mode

Status	Network	SIP Account	Phone	Administration		
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing

**INTERNET**

**WAN**

Connect Name	1_MANAGEMENT_VOICE_INTERNET_R_VID ▾	<input type="button" value="Delete Connect"/>
Service	MANAGEMENT_VOICE_INTERNET ▾	
IP Protocol Version	IPv4 ▾	
WAN IP Mode	Bridge ▾	
Bridge Type	IP Bridge ▾	
DHCP Service Type	Pass Through ▾	
VLAN Mode	Disable ▾	
VLAN ID	1 (1-4094)	

Port Bind

Port\_1

Note : WAN connection can not be shared between the binding port , and finally bound port WAN connections bind operation will wash away before the other WAN connection to the port binding operation !

Field Name	Description
<b>Bridge Type</b>	
IP Bridge	Allow all Ethernet packets to pass. PC can connect to upper network directly.
PPPoE Bridge	Only Allow PPPoE packets pass. PC needs PPPoE dial-up software.
Hardware IP Bridge	Packets pass through hardware switch with wired speed. Does not support wireless port binding
<b>DHCP Service Type</b>	
Pass Through	DHCP packets can be forwarded between WAN and LAN, DHCP server in adapter will not allocate IP to clients of LAN port.
DHCP Snooping	When adapter forwards DHCP packets from LAN to WAN it will add option82 to DHCP packet, and it will remove option82 when forwarding DHCP packet from the WAN interface to the LAN interface. Local DHCP service will not allocate IP to clients of LAN port.

Local Service	adapter will not forward DHCP packets between LAN and WAN, it also blocks DHCP packets from the WAN port. Clients connected to the LAN port can get IP from DHCP server run in adapter.
---------------	---

---

**VLAN Mode**

---

Disable	The WAN interface is untagged. LAN is untagged.
Enable	The WAN interface is tagged. LAN is untagged.
Trunk	Only valid in bridge mode. All ports, including WAN and LAN, belong to this VLAN Id and all ports are tagged with this VLAN id. Tagged packets can pass through WAN and LAN.
VLAN ID	Set the VLAN ID.
802.1p	Set the priority of VLAN, Options are 0~7.

---

**Note**

Multiple WAN connections may be created with the same VLAN ID

---

## LAN

### LAN Port

NAT translates the packets from public IP address to local IP address to forward packets to the proper destination.

**Table 16** LAN port

Status	Network	SIP Account	Phone	Administration
WAN	LAN	VPN	DMZ	MAC Clone
Port Setting				

**PC Port(LAN)**

**PC Port(LAN)**

Local IP Address	192.168.1.1	
Local Subnet Mask	255.255.255.0	
Local DHCP Server	Enable ▼	
DHCP Start Address	192.168.1.2	
DHCP End Address	192.168.1.254	
DNS Mode	Auto ▼	
Primary DNS	192.168.1.1	
Secondary DNS	192.168.10.1	
Client Lease Time(0-86400s)	86400	
	DHCP Client List	
DHCP Static Allotment		
NO.	MAC	IP Address
1		
2		
3		
DNS Proxy	Enable ▼	

Field Name	Description
IP Address	Enter the IP address of the router on the local area network. All the IP addresses of the computers which are in the router's LAN must be in the same network segment with this address, and the default adapter of the computers must be this IP address. (The default is 192.168.11.1).
Local Subnet Mask	Enter the subnet mask to determine the size of the network (default is 255.255.255.0/24).
Local DHCP Server	Enable/Disable Local DHCP Server.

DHCP Start Address	Enter a valid IP address as a starting IP address of the DHCP server, and if the router's LAN IP address is 192.168.11.1, starting IP address can be 192.168.11.2 or greater, but should be less than the ending IP address.
DHCP End Address	Enter a valid IP address as an end IP address of the DHCP server.
DNS Mode	Select DNS mode, options are Auto and Manual:  When DNS mode is Auto, the device under LAN port will automatically obtain the preferred DNS and alternate DNS.  When DNS mode is Manual, the user should manually configure the preferred DNS and alternate DNS.
Primary DNS	Enter the preferred DNS address.
Secondary DNS	Enter the secondary DNS address.
Client Lease Time	This option defines how long the address will be assigned to the computer within the network. In that period, the server does not assign the IP address to the other computer.
DNS Proxy	Enable or disable; If enabled, the device will forward the DNS request of LAN-side network to the WAN side network.

## VPN

VPN is a technology that builds a private network on a public network. The connection between any two nodes of the VPN network does not have the end-to-end physical link required by the traditional private network, but rather the network platform provided by the public network service provider, and the user data is transmitted in the logical link. With VPN technology, you can establish private connections and transfer data between any two devices on the public network.

**Table 17** PPTP

Status	Network	SIP Account	Phone	Administration		
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing

### VPN Settings

**Administration**

VPN Enable	PPTP
Initial Service IP	
User Name	
Password	*****
VPN As Default Route	Disable
MPPE Stateful	Disable
Require MPPE	Disable

Parameters name	Description
VPN Enable	Whether to enable VPN. Select PPTP mode.
Initial Service IP	The IP address of the VPN server.
User Name	The user name required for authentication.
Password	The password required for authentication.
VPN As Default Route	Prohibited or open, the default is prohibited.
MPPE Stateful	Disable or enable MPPE Stateful.
Require MPPE	Disable or enable Require MPPE.

**Table 18** L2TP

Status	Network	SIP Account	Phone	Administration
WAN	LAN	VPN	DMZ	MAC Clone
Port Setting	Routing			

**VPN Settings**

**Administration**

VPN Enable	<input type="button" value="L2TP ▼"/>
Initial Service IP	<input type="text"/>
User Name	<input type="text"/>
Password	<input type="text"/>
L2TP Tunnel Name	<input type="text"/>
L2TP Tunnel Password	<input type="text"/>
VPN As Default Route	<input type="button" value="Disable ▼"/>

Parameters name	Description
VPN Enable	Whether to enable VPN. Select PPTP mode.
Initial Service IP	The IP address of the VPN server.
User Name	The user name required for authentication.
Password	The password required for authentication.
L2TP Tunnel Name	L2TP Tunnel Name
L2TP Tunnel Password	L2TP Tunnel Password
VPN As Default Route	Prohibited or open, the default is prohibited.

**Table 19** OpenVPN

Status	<b>Network</b>	SIP Account	Phone	Administration	
WAN	LAN	VPN	DMZ	MAC Clone	
Port Setting	Routing				
<b>VPN Settings</b>					
<b>Administration</b>					
VPN Enable	OpenVPN ▼				
OpenVPN TLS Auth	Disable ▼				
VPN As Default Route	Disable ▼				
<b>Parameters name</b>			<b>Description</b>		
VPN Enable	Whether to enable VPN. Select OpenVPN mode.				
OpenVPN TLS Auth	Whether OpenVPN TLS authentication is enabled				
VPN As Default Route	Prohibited or open, the default is prohibited.				

## DMZ

**Table 20** DMZ

Status	<b>Network</b>	SIP Account	Phone	Administration	
WAN	LAN	VPN	DMZ	MAC Clone	
Port Setting	Routing				
<b>Demilitarized Zone (DMZ)</b>					
<b>DMZ Setting</b>					
DMZ Enable	Enable ▼				
DMZ Host IP Address	<input type="text"/>				
<b>Field Name</b>			<b>Description</b>		
DMZ Enable	Enable/Disable DMZ.				
DMZ Host IP Address	Enter the private IP address of the DMZ host.				

## MAC Clone

Some ISPs will require you to register your MAC address. If you do not wish to re-register your MAC address, you can have the router clone the MAC address that is registered with your ISP. To use the Clone Address button, the computer viewing the Web-base utility screen will have the MAC address automatically entered in the Clone WAN MAC field.

**Table 21** MAC Clone

Status	Network	SIP Account	Phone	Administration						
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing				
<b>MAC Address Clone</b>										
<p><b>MAC Address Clone</b></p> <table border="0"> <tr> <td>MAC Address Clone</td> <td style="text-align: right;">Enable <input type="button" value="▼"/></td> </tr> <tr> <td>MAC Address</td> <td style="text-align: right;"><input type="text"/> <input type="button" value="Get Current PC MAC"/></td> </tr> </table>							MAC Address Clone	Enable <input type="button" value="▼"/>	MAC Address	<input type="text"/> <input type="button" value="Get Current PC MAC"/>
MAC Address Clone	Enable <input type="button" value="▼"/>									
MAC Address	<input type="text"/> <input type="button" value="Get Current PC MAC"/>									

Config steps:

1. Enabling MAC address cloning
2. Press the button  gets PC's MAC address
3. Press the button  to save your changes if users don't want to use MAC clone, press the button to cancel the changes
4. Press the button  to make the changes effective.

## Port Setting

**Table 22** Port setting

Status	Network	SIP Account	Phone	Administration						
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing				
<b>Port Setting</b>										
<p><b>Port Setting</b></p> <table border="0"> <tr> <td>WAN Port Speed Nego</td> <td style="text-align: right;"><input type="button" value="Auto ▼"/></td> </tr> <tr> <td>LAN1 Port Speed Nego</td> <td style="text-align: right;"><input type="button" value="Auto ▼"/></td> </tr> </table>							WAN Port Speed Nego	<input type="button" value="Auto ▼"/>	LAN1 Port Speed Nego	<input type="button" value="Auto ▼"/>
WAN Port Speed Nego	<input type="button" value="Auto ▼"/>									
LAN1 Port Speed Nego	<input type="button" value="Auto ▼"/>									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 5px;">Field Name</th> <th style="text-align: left; padding: 5px;">Description</th> </tr> </thead> <tbody> <tr> <td style="padding: 5px;">WAN Port speed Nego</td> <td style="padding: 5px;">Auto-negotiation, options are Auto, 100M full, 100M half-duplex, 10M half and full.</td> </tr> </tbody> </table>							Field Name	Description	WAN Port speed Nego	Auto-negotiation, options are Auto, 100M full, 100M half-duplex, 10M half and full.
Field Name	Description									
WAN Port speed Nego	Auto-negotiation, options are Auto, 100M full, 100M half-duplex, 10M half and full.									

LAN Port Speed Nego	Auto-negotiation, options are Auto, 100M full, 100M half, 10M half and 10M full.
---------------------	--

## Routing

**Table 23** Routing


Status	<b>Network</b>	SIP Account	Phone	Administration																																										
WAN	LAN	VPN	DMZ	MAC Clone	Port Setting	Routing																																								
<b>Static Routing Settings</b> <hr/> <p><b>Add a routing rule</b></p> <table> <tr> <td>Destination</td> <td><input type="text"/></td> </tr> <tr> <td>Host/Net</td> <td><input type="text"/> Host ▼</td> </tr> <tr> <td>Gateway</td> <td><input type="text"/></td> </tr> <tr> <td>Interface</td> <td><input type="text"/> LAN ▼</td> </tr> <tr> <td>Comment</td> <td><input type="text"/></td> </tr> <tr> <td colspan="2" style="text-align: center;"> <input type="button" value="Apply"/> <input type="button" value="Reset"/> </td> </tr> </table> <hr/> <p><b>Current Routing table in the system</b></p> <table border="1"> <thead> <tr> <th>No.</th> <th>Destination</th> <th>Mask</th> <th>Gateway</th> <th>Flags</th> <th>Metric</th> <th>Interface</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td colspan="8" style="text-align: center;"> <input type="button" value="Delete Selected"/> <input type="button" value="Reset"/> </td> </tr> </tbody> </table> <hr/> <table border="1"> <thead> <tr> <th>Field Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>Destination</td> <td>Destination address</td> </tr> <tr> <td>Host/Net</td> <td>Both Host and Net selection</td> </tr> <tr> <td>adapter</td> <td>adapter IP address</td> </tr> <tr> <td>Interface</td> <td>LAN/WAN/Custom three options, and add the corresponding address</td> </tr> <tr> <td>Comment</td> <td>Comment</td> </tr> </tbody> </table>							Destination	<input type="text"/>	Host/Net	<input type="text"/> Host ▼	Gateway	<input type="text"/>	Interface	<input type="text"/> LAN ▼	Comment	<input type="text"/>	<input type="button" value="Apply"/> <input type="button" value="Reset"/>		No.	Destination	Mask	Gateway	Flags	Metric	Interface	Comment	<input type="button" value="Delete Selected"/> <input type="button" value="Reset"/>								Field Name	Description	Destination	Destination address	Host/Net	Both Host and Net selection	adapter	adapter IP address	Interface	LAN/WAN/Custom three options, and add the corresponding address	Comment	Comment
Destination	<input type="text"/>																																													
Host/Net	<input type="text"/> Host ▼																																													
Gateway	<input type="text"/>																																													
Interface	<input type="text"/> LAN ▼																																													
Comment	<input type="text"/>																																													
<input type="button" value="Apply"/> <input type="button" value="Reset"/>																																														
No.	Destination	Mask	Gateway	Flags	Metric	Interface	Comment																																							
<input type="button" value="Delete Selected"/> <input type="button" value="Reset"/>																																														
Field Name	Description																																													
Destination	Destination address																																													
Host/Net	Both Host and Net selection																																													
adapter	adapter IP address																																													
Interface	LAN/WAN/Custom three options, and add the corresponding address																																													
Comment	Comment																																													

# SIP Account

---

## Account

You can set each FXS's display name, phone number, account and password in this page, the corresponding FXS will be enable after checked enable .then save your settings. Click "Other settings" go to the "FXS Settings" web page. SIP Settings.

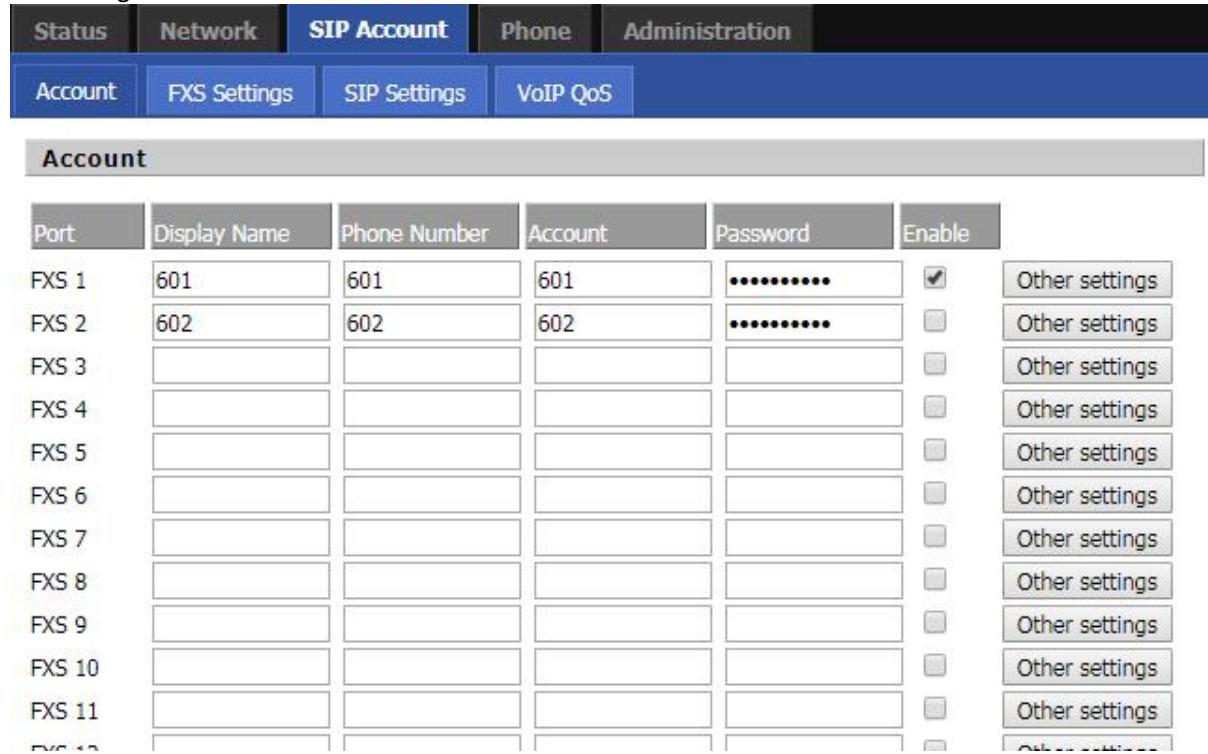

The screenshot shows a web-based configuration interface for SIP accounts. At the top, there is a navigation bar with tabs: Status, Network, SIP Account (which is selected and highlighted in blue), Phone, and Administration. Below the navigation bar, there is a sub-navigation bar with tabs: Account (selected and highlighted in blue), FXS Settings, SIP Settings, and VoIP QoS. The main content area is titled "Account" and contains a table with 12 rows, each representing an FXS port. The columns in the table are: Port, Display Name, Phone Number, Account, Password, and Enable. The "Enable" column contains checkboxes. The "Password" column shows masked passwords. The "Enable" column shows checked checkboxes for FXS 1 and FXS 2, and unchecked checkboxes for FXS 3 through FXS 12. To the right of the "Enable" column, there is a "Other settings" link for each row.

Port	Display Name	Phone Number	Account	Password	Enable	Other settings
FXS 1	601	601	601	*****	<input checked="" type="checkbox"/>	Other settings
FXS 2	602	602	602	*****	<input type="checkbox"/>	Other settings
FXS 3					<input type="checkbox"/>	Other settings
FXS 4					<input type="checkbox"/>	Other settings
FXS 5					<input type="checkbox"/>	Other settings
FXS 6					<input type="checkbox"/>	Other settings
FXS 7					<input type="checkbox"/>	Other settings
FXS 8					<input type="checkbox"/>	Other settings
FXS 9					<input type="checkbox"/>	Other settings
FXS 10					<input type="checkbox"/>	Other settings
FXS 11					<input type="checkbox"/>	Other settings
FXS 12					<input type="checkbox"/>	Other settings

## FXS Settings

### Basic

Set the basic information provided by your VOIP Service Provider, such as Phone Number, Account, password, SIP Proxy and others.

**Table 24** Line

Status	Network	SIP Account	Phone	Administration
Account	FXS Settings	SIP Settings	VoIP QoS	

Port
FXS 1 ▼
Batch Settings

**Basic**

**Basic Setup**

Port Enable	<input type="button" value="Enable ▼"/>	Outgoing Call without Registration	<input type="button" value="Disable ▼"/>
-------------	---	------------------------------------	--

**Proxy and Registration**

Proxy Server	<input type="text" value="192.168.10.88"/>	Proxy Port	<input type="text" value="5060"/>
Outbound Server	<input type="text"/>	Outbound Port	<input type="text" value="5060"/>
Backup Outbound Server	<input type="text"/>	Backup Outbound Port	<input type="text" value="5060"/>

**Subscriber Information**

Display Name	<input type="text" value="601"/>	Phone Number	<input type="text" value="601"/>
Account	<input type="text" value="601"/>	Password	<input type="text" value="*****"/>

Field Name	Description
Line Enable	Enable/Disable the line.
Outgoing Call without Registration	Enable/Disable Outgoing Call without Registration
Outgoing Call without Registration	If enabled, SIP-1 will not send register request to SIP server; but in Status/ SIP Account Status webpage, Status is Registered; lines 1 can dial out, but the external line number cannot dialed line1.
Proxy Server	The IP address or the domain of SIP Server
Outbound Server	The IP address or the domain of Outbound Server
Backup Outbound Server	The IP address or the domain of Backup Outbound Server
Proxy port	SIP Service port, default is 5060
Outbound Port	Outbound Proxy's Service port, default is 5060
Backup Outbound Port	Backup Outbound Proxy's Service port, default is 5060
Display Name	The number will be displayed on LCD
Phone Number	Enter telephone number provided by SIP Proxy
Account	Enter SIP account provided by SIP Proxy

Password	Enter SIP password provided by SIP Proxy
----------	--

## Audio Configuration

**Table 25** Audio configuration

Audio Configuration																																			
<b>Codec Setup</b> <table border="1"> <tr> <td>Audio Codec Type 1</td> <td>G.711U ▾</td> <td>Audio Codec Type 2</td> <td>G.711A ▾</td> </tr> <tr> <td>Audio Codec Type 3</td> <td>G.729 ▾</td> <td>Audio Codec Type 4</td> <td>G.722 ▾</td> </tr> <tr> <td>Audio Codec Type 5</td> <td>G.723 ▾</td> <td>Audio Codec Type 6</td> <td>G726-32 ▾</td> </tr> <tr> <td>Audio Codec Type 7</td> <td>iLBC ▾</td> <td></td> <td></td> </tr> <tr> <td>G.723 Coding Speed</td> <td>5.3k bps ▾</td> <td>Packet Cycle (ms)</td> <td>20 ▾</td> </tr> <tr> <td>Silence Supp</td> <td>Disable ▾</td> <td>Echo Cancel</td> <td>Enable ▾</td> </tr> <tr> <td>Auto Gain Control</td> <td>Disable ▾</td> <td>Use First Matching Vocoder in 200OK SDP</td> <td>Disable ▾</td> </tr> <tr> <td>Codec Priority</td> <td>Remote ▾</td> <td>Packet Cycle Follows Remote SDP</td> <td>Disable ▾</td> </tr> </table>				Audio Codec Type 1	G.711U ▾	Audio Codec Type 2	G.711A ▾	Audio Codec Type 3	G.729 ▾	Audio Codec Type 4	G.722 ▾	Audio Codec Type 5	G.723 ▾	Audio Codec Type 6	G726-32 ▾	Audio Codec Type 7	iLBC ▾			G.723 Coding Speed	5.3k bps ▾	Packet Cycle (ms)	20 ▾	Silence Supp	Disable ▾	Echo Cancel	Enable ▾	Auto Gain Control	Disable ▾	Use First Matching Vocoder in 200OK SDP	Disable ▾	Codec Priority	Remote ▾	Packet Cycle Follows Remote SDP	Disable ▾
Audio Codec Type 1	G.711U ▾	Audio Codec Type 2	G.711A ▾																																
Audio Codec Type 3	G.729 ▾	Audio Codec Type 4	G.722 ▾																																
Audio Codec Type 5	G.723 ▾	Audio Codec Type 6	G726-32 ▾																																
Audio Codec Type 7	iLBC ▾																																		
G.723 Coding Speed	5.3k bps ▾	Packet Cycle (ms)	20 ▾																																
Silence Supp	Disable ▾	Echo Cancel	Enable ▾																																
Auto Gain Control	Disable ▾	Use First Matching Vocoder in 200OK SDP	Disable ▾																																
Codec Priority	Remote ▾	Packet Cycle Follows Remote SDP	Disable ▾																																
<b>FAX Configuration</b> <table border="1"> <tr> <td>FAX Mode</td> <td>T.30 ▾</td> <td>Bypass Attribute Value</td> <td>fax/modem ▾</td> </tr> <tr> <td>Enable T.38 CNG Detect</td> <td>Disable ▾</td> <td>Enable T.38 CED Detect</td> <td>Enable ▾</td> </tr> <tr> <td>Enable gpm attribute</td> <td>Disable ▾</td> <td>T.38 Redundancy</td> <td>Disable ▾</td> </tr> <tr> <td>Max Fax Rate</td> <td>14400 ▾</td> <td></td> <td></td> </tr> </table>				FAX Mode	T.30 ▾	Bypass Attribute Value	fax/modem ▾	Enable T.38 CNG Detect	Disable ▾	Enable T.38 CED Detect	Enable ▾	Enable gpm attribute	Disable ▾	T.38 Redundancy	Disable ▾	Max Fax Rate	14400 ▾																		
FAX Mode	T.30 ▾	Bypass Attribute Value	fax/modem ▾																																
Enable T.38 CNG Detect	Disable ▾	Enable T.38 CED Detect	Enable ▾																																
Enable gpm attribute	Disable ▾	T.38 Redundancy	Disable ▾																																
Max Fax Rate	14400 ▾																																		

Field Name	Description
Audio Codec Type1	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
Audio Codec Type2	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
Audio Codec Type3	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
Audio Codec Type4	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
Audio Codec Type5	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
G.723 Coding Speed	Choose the speed of G.723 from 5.3kbps and 6.3kbps
Packet Cycle	The RTP packet cycle time, default is 20ms
Silence Supp	Enable/Disable silence support
Echo Cancel	Enable/Disable echo cancel. By default, it is enabled
Auto Gain Control	Enable/Disable auto gain
T.38 Enable	Enable/Disable T.38
T.38 Redundancy	Enable/Disable T.38 Redundancy
T.38 CNG Detect Enable	Enable/Disable T.38 CNG Detect
gpm attribute Enable	Enable/Disable gpm attribute

## Supplementary Service Subscription

**Table 26** Supplementary service

Supplementary Service Subscription																			
<b>Supplementary Services</b> <table border="1"> <tr> <td>Call Waiting</td> <td>Enable ▼</td> <td>Hot Line</td> <td><input type="text"/></td> </tr> <tr> <td>MWI Enable</td> <td>Enable ▼</td> <td>Voice Mailbox Numbers</td> <td><input type="text"/></td> </tr> <tr> <td>MWI Subscribe Enable</td> <td>Disable ▼</td> <td>VMWI Serv</td> <td>Enable ▼</td> </tr> <tr> <td>DND</td> <td>Disable ▼</td> <td colspan="2"></td> </tr> </table>				Call Waiting	Enable ▼	Hot Line	<input type="text"/>	MWI Enable	Enable ▼	Voice Mailbox Numbers	<input type="text"/>	MWI Subscribe Enable	Disable ▼	VMWI Serv	Enable ▼	DND	Disable ▼		
Call Waiting	Enable ▼	Hot Line	<input type="text"/>																
MWI Enable	Enable ▼	Voice Mailbox Numbers	<input type="text"/>																
MWI Subscribe Enable	Disable ▼	VMWI Serv	Enable ▼																
DND	Disable ▼																		
<b>Speed Dial</b> <table border="1"> <tr> <td>Speed Dial 2</td> <td><input type="text"/></td> <td>Speed Dial 3</td> <td><input type="text"/></td> </tr> <tr> <td>Speed Dial 4</td> <td><input type="text"/></td> <td>Speed Dial 5</td> <td><input type="text"/></td> </tr> <tr> <td>Speed Dial 6</td> <td><input type="text"/></td> <td>Speed Dial 7</td> <td><input type="text"/></td> </tr> <tr> <td>Speed Dial 8</td> <td><input type="text"/></td> <td>Speed Dial 9</td> <td><input type="text"/></td> </tr> </table>				Speed Dial 2	<input type="text"/>	Speed Dial 3	<input type="text"/>	Speed Dial 4	<input type="text"/>	Speed Dial 5	<input type="text"/>	Speed Dial 6	<input type="text"/>	Speed Dial 7	<input type="text"/>	Speed Dial 8	<input type="text"/>	Speed Dial 9	<input type="text"/>
Speed Dial 2	<input type="text"/>	Speed Dial 3	<input type="text"/>																
Speed Dial 4	<input type="text"/>	Speed Dial 5	<input type="text"/>																
Speed Dial 6	<input type="text"/>	Speed Dial 7	<input type="text"/>																
Speed Dial 8	<input type="text"/>	Speed Dial 9	<input type="text"/>																
Field Name	Description																		
Call Waiting	Enable/Disable Call Waiting																		
Hot Line	Fill in the hotline number, Pickup handset or press hands-free or headset button, the device will dial out the hotline number automatically																		
MWI Enable	Enable/Disable MWI (message waiting indicate). If the user needs to user voice mail, please enable this feature																		
MWI Subscribe Enable	Enable/Disable MWI Subscribe																		
Voice Mailbox Numbers	Fill in the voice mailbox phone number, Asterisk platform, for example, its default voice mail is *97																		
DND	Enable/Disable DND (do not disturb)																		
Speed Dial	Enter the speed dial phone numbers. Dial *74 to active speed dial function Then press the speed dial numbers, for example, press 2, phone dials 075526099365 directly																		

## Advanced

Table 27 Advanced

Advanced	
<b>SIP Advanced Setup</b>	
Domain Name Type	Enable ▼
Signal Port	53378
RFC2833 Payload(>=96)	101
Caller ID Header	FROM ▼
Session Refresh Time(sec)	0
SIP 100REL Enable	Disable ▼
Initial Reg With Authorization	Disable ▼
Primary Server Detect Interval	0
NAT Keep-alive Interval(10-60s)	15
Anonymous Call Block	Disable ▼
Use OB Proxy In Dialog	Disable ▼
Reg Subscribe Enable	Disable ▼
Dial Prefix	
Hold Method	ReINVITE ▼
Only Recv Request From Server	Disable ▼
SIP Received Detection	Disable ▼
SIP Encrypt Type	Disable ▼
Country Code	
Tel URL	Disable ▼
Min Random SIP Port	50000
Prefer Primary SIP Server	Disable ▼
Carry Port Information	Disable ▼
DTMF Type	Inband ▼
Register Refresh Interval(sec)	3600
Remove Last Reg	Enable ▼
Refresher	UAC ▼
SIP OPTIONS Enable	Disable ▼
Reply 182 On Call Waiting	Disable ▼
Max Detect Fail Count	3
Anonymous Call	Disable ▼
Proxy DNS Type	A Type ▼
Complete Register	Disable ▼
Reg Subscribe Interval(sec)	0
User Type	Phone ▼
Request-URI User Check	Enable ▼
Server Address	
VPN	Disable ▼
RTP Encrypt Type	Disable ▼
Remove Country Code	Disable ▼
Use Random SIP Port	Enable ▼
Max Random SIP Port	60000
<b>RTP Advanced Setup</b>	
RTP Port Min	0 (0 means auto select)
RTP Port Max	50000
Parameter name	Description
Domain Name Type	Whether to enable domain name recognition in SIP URIs
Carry Port Information	Whether to carry the SIP URI port information
Signal Port	The local port number of the SIP protocol
DTMF Type	Select the second way of dialing, optional items are In-band, RFC2833 and SIP Info.
RFC2833 Payload(>=96)	The user can use the default settings
Register Refresh Interval(sec)	The time interval between two normal registration messages. The user can use the default settings.

Caller ID Header	When enabled, an unregistered message will be sent before the registration is disabled, and no unregistered messages will be sent before registration; should be set according to the different server requirements
Remove Last Reg	Whether to remove the last registration message
Session Refresh Time(sec)	The interval between two sessions, the user can use the default settings
Refresher	Select Refresh from UAC and UAS
SIP 100REL Enable	If this option is enabled, the IP phone will send SIP-OPTION to the server instead of sending Hello messages on a regular basis. The interval for sending is the parameter set for the "NAT Hold Interval" parameter.
SIP OPTIONS Enable	Whether to open the SIP OPTION function
Initial Reg With Authorization	Whether to carry the certification information when registering
Reply 182 On Call Waiting	Whether or not to send 182 when the call is waiting
NAT Keep-alive Interval(10-60s)	The time interval for sending empty packets
Anonymous Call	Whether anonymous calls are enabled
Anonymous Call Block	Whether to enable anonymous call blocking
Proxy DNS Type	Set the DNS server type, the optional items are Type A, DNS SRV, and Auto
Use OB Proxy In Dialog	Whether the OB agent is used in the conversation
Complete Register	Whether to enable full registration
Reg Subscribe Enable	When enabled, the subscription message is sent after the registration message; the subscription message is not sent when disabled
Reg Subscribe Interval(sec)	Disable or enable Reg Subscribe Interval
Dial Prefix	Dial before prefix
User Type	Whether the end user is IP or Phone
Hold Method	Call hold is REINVITE or INFO
Request-URI User Check	Whether to allow the user to check
Only Recv Request From Server	If enabled, will only accept requests from the server, do not accept other requests
Server Address	SIP server address
SIP Received Detection	Whether to allow SIP receive detection
VPN	Whether to enable VPN
SIP Encrypt Type	Whether to allow SIP message encryption
RTP Encrypt Type	Whether to allow RTP message encryption
Country Code	Country code

Remove Country Code	Whether to allow the removal of national codes
Tel URL	Whether to open the Tel URL
Use Random SIP Port	Whether to use the minimum random port
Min Random SIP Port	SIP minimum random port
Max Random SIP Port	SIP maximum random port
Prefer Primary SIP Server	Whether to enable the preferred primary server
Hold SDP Attribute Inactive	Whether to enable the call to keep the inactive attribute
RTP Port Min	RTP minimum port
RTP Port Max	RTP's maximum port

## SIP Settings

Table 28 SIP Settings

Status	Network	SIP Account	Phone	Administration
Account	FXS Settings	SIP Settings	VoIP QoS	

### SIP Parameters

SIP T1	500	ms	Max Forward	70
SIP User Agent Name			Max Auth	2
Reg Retry Intvl	30	sec	Reg Retry Long Intvl	1200 sec
Mark All AVT Packets	Enable	▼	RFC 2543 Call Hold	Enable
SRTP	Disable	▼	SRTP Prefer Encryption	AES_CM
Service Type	Common	▼	DNS Refresh Timer	0 sec

### Response Status Code Handling

Retry Reg RSC	
---------------	--

### NAT Traversal

NAT Traversal	Disable	▼	STUN Server Address	
NAT Refresh Interval(sec)	60		STUN Server Port	3478

Parameters name	Description
<b>SIP Parameters</b>	
SIP T1	The default value is 500
SIP User Agent Name	Enter the SIP User Agent header field
Max Forward	Modify the maximum hop value, the default is 70

Max Auth	Change the number of authentication failures, the default value is 2
Reg Retry Intvl	Registration failed again registration interval, default is 30
Reg Retry Long Intvl	Registration failed Register again for the long interval Default 1200
Mark All AVT Packets	The default enable is on
RFC 2543 Call Hold	The default enable is on
SRTP	The default is disabled
SRTP Prefer Encryption	Support for AES_CM and ARIA_CM
Service Type	Default general
DNS Refresh Timer	Modify the DNS refresh time, the default value of 0
Transport	The transmission type defaults to UDP
<b>Response Status Code Handling</b>	
Retry Reg RSC	You can fill in Retry Reg RSC here
<b>NAT Traversal</b>	
NAT Traversal	Whether to enable NAT mode, or select STUN to penetrate
STUN Server Address	STUN server IP address
NAT Refresh Interval(sec)	Refresh interval
STUN Server Port	STUN port, the default is 3478

## VoIP QoS

**Table 29** VoIP QoS

Status	Network	SIP Account	Phone	Administration
Account	FXS Settings	SIP Settings	VoIP QoS	
<b>QoS Settings</b>				
<b>Layer 3 QoS</b>				
SIP QoS(0-63)		46		
RTP QoS(0-63)		46		
Parameters name		Description		
SIP QoS(0-63)		Defaults to 46,you can set a range of values is 0~63		
RTP QoS(0-63)		Defaults to 46,you can set a range of values is 0~63		

Configuration can be based on the scene environment to modify the parameters

# Phone

---

## Preferences

### Preferences

**Table 30** Preferences

Status	Network	SIP Account	Phone	Administration										
Preferences	Dial Plan	Call Log												
Port	FXS 1 ▼	Batch Settings	<input type="checkbox"/>											
<b>Preferences</b> <hr/> <b>Volume Settings</b> <table border="1"> <tr> <td>Handset Input Gain</td> <td>5 ▼</td> <td>Handset Volume</td> <td>5 ▼</td> </tr> </table> <hr/> <table border="1"> <thead> <tr> <th>Field Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>Handset Input Gain</td> <td>Adjust the handset input gain from 0 to 7.</td> </tr> <tr> <td>Handset Volume</td> <td>Adjust the output gain from 0 to 7.</td> </tr> </tbody> </table>					Handset Input Gain	5 ▼	Handset Volume	5 ▼	Field Name	Description	Handset Input Gain	Adjust the handset input gain from 0 to 7.	Handset Volume	Adjust the output gain from 0 to 7.
Handset Input Gain	5 ▼	Handset Volume	5 ▼											
Field Name	Description													
Handset Input Gain	Adjust the handset input gain from 0 to 7.													
Handset Volume	Adjust the output gain from 0 to 7.													

## Regional

**Table 31** Regional

Regional			
Tone Type	USA ▼		
Dial Tone			
Busy Tone			
Off Hook Warning Tone			
Ring Back Tone			
Call Waiting Tone			
Min Jitter Delay(0-600ms)	20	Max Jitter Delay(20-1000ms)	160
Ringing Time(10-300sec)	60		
Ring Waveform	Sinusoid ▼	Ring Voltage(40-63 Vrms)	45
Ring Frequency(15-30Hz)	25	VMWI Ring Splash Len(0.1-10sec)	0.5
Flash Time Max(0.2-1sec)	0.9	Flash Time Min(0.1-0.5sec)	0.1

Field Name	Description
Tone Type	Choose tone type form China, US, Hong Kong and so on.
Dial Tone	Dial Tone
Busy Tone	Busy Tone
Off Hook Warning	Off Hook warning tone
Ring Back Tone	Ring back tone
Call Waiting Tone	Call waiting tone
Min Jitter Delay	The Min value of home adapter's jitter delay, home adapter is an adaptive jitter mechanism.
Max Jitter Delay	The Max value of home adapter's jitter delay, home adapter is an adaptive jitter mechanism.
Ringing Time	How long CnPilot Home R190/R200x will ring when there is an incoming call.
Ring Waveform	Select regional ring waveform, options are Sinusoid and Trapezoid, the default Sinusoid.
Ring Voltage	Set ringing voltage, the default value is 70
Ring Frequency	Set ring frequency, the default value is 25
VMWI Ring Splash Len(sec)	Set the VMWI ring splash length, default is 0.5s.
Flash Time Max(sec)	Set the Max value of the device's flash time, the default value is 0.9
Flash Time Min(sec)	Set the Min value of the device's flash time, the default value is 0.1

## Features and Call Forward

**Table 32** Features and call forward

Features			
All Forward	Disable ▼	Busy Forward	Disable ▼
No Answer Forward	Disable ▼	Transfer On Hook	Enable ▼

Call Forward			
All Forward	<input type="text"/>	Busy Forward	<input type="text"/>
No Answer Forward	<input type="text"/>	No Answer Timeout	20

Feature Code			
Hold Key Code	<input type="text"/> *77	Conference Key Code	<input type="text"/> *88
Transfer Key Code	<input type="text"/> *98	IVR Key Code	<input type="text"/> ****
R Key Enable	Disable ▼	R Key Cancel Code	<input type="text"/> R1 ▼
R Key Hold Code	<input type="text"/> R2 ▼	R Key Transfer Code	<input type="text"/> R4 ▼
R Key Conference Code	<input type="text"/> R3 ▼	Speed Dial Code	<input type="text"/> *74

Field Name		Description
Features	All Forward	Enable/Disable forward all calls
	Busy Forward	Enable/Disable busy forward.
	No Answer Forward	Enable/Disable no answer forward.
Call Forward	All Forward	Set the target phone number for all forward.  The device will forward all calls to the phone number immediately when there is an incoming call.
	Busy Forward	The phone number which the calls will be forwarded to when line is busy.
	No Answer Forward	The phone number which the call will be forwarded to when there's no answer.
	No Answer Timeout	The seconds to delay forwarding calls, if there is no answer at your phone.
Feature Code	Hold key code	Call hold signatures, default is *77.
	Conference key code	Signature of the tripartite session, default is *88.
	Transfer key code	Call forwarding signatures, default is *98.
	IVR key code	Signatures of the voice menu, default is ****.

R key enable	Enable/Disable R key way call features.
R key cancel code	Set the R key cancel code, option are ranged from R1 to R9, default value is R1.
R key hold code	Set the R key hold code, options are ranged from R1 to R9, default value is R2.
R key transfer code	Set the R key transfer code, options are ranged from R1 to R9, default value is R4.
R key conference code	Set the R key conference code, options are ranged from R1 to R9, default value is R3.
R Key Reject 2nd Call Code	Set the R key Reject 2nd Call code, options are ranged from R1 to R9, default value is R0.
Speed Dial Code	Speed dial code, default is *74.

## Miscellaneous

**Table 33** Miscellaneous

Miscellaneous	
Loop Current	26
CID Service	Enable ▼
Caller ID Method	Bellcore ▼
Dial Time Out(IDT)	5
ICMP Ping	Disable ▼
Bellcore Style 3-Way Conference	Disable ▼
Impedance Maching	US PBX,Korea,Taiwan(600) ▼
CWCID Service	Disable ▼
Polarity Reversal	Disable ▼
Call Immediately Key	# ▼
Escaped char enable	Disable ▼
On-Hook Voltage	48
Field Name	Description
Codec Loop Current	Set off-hook loop current, default is 26
Impedance Maching	Set impedance matching, default is US PBX,Korea,Taiwan(600).
CID service	Enable/Disable displaying caller ID; If enable, caller ID is displayed when there is an incoming call or it won't be displayed. Default is enable.
CWCID Service	Enable/Disable CWCID. If enable, the device will display the waiting call's caller ID, or it won't display. Default is disable.
Dial Time Out	How long device will sound dial out tone when device dials a number.
Call Immediately Key	Choose call immediately key form * or #.

ICMP Ping	Enable/Disable ICMP Ping. If enable this option, home adapter will ping the SIP Server every interval time, otherwise, It will send “hello” empty packet to the SIP Server.
Escaped char enable	Open special character translation function; if enable, when you press the # key, it will be translated to 23%, when disable, it is just #

## Dial Rule

**Table 34** Dial Plan

Field Name	Description
Dial Plan Enable	Enable/Disable dial plan.
Unmatched Policy	

## Dial Plan Syntactic

**Table 35** Dial Plan Syntactic

No.	String	Description
1	0 1 2 3 4 5 6 7 8 9 * #	Allowed characters
2	x	Lowercase letter x stands for one legal character

---

		To match one character form sequence. For example: [0-9]: match one digit form 0 to 9 [23-5*]: match one character from 2 or 3 or 4 or 5 or *
3	[sequence]	[x <sup>0</sup> x <sup>1</sup> x <sup>2</sup> x <sup>3</sup> x <sup>n</sup> ]
4	x.	Match to , , , ... For example: “01.” :can match “0”, “01”, “011”, “0111”, .....,” 01111...”
5	<dialed:substituted>	Replace dialed with substituted. For example: <8:1650>123456: input is “85551212”, output is “16505551212”
6	x,y	Make outside dial tone after dialing “x”, stop until dialing character “y” For example: “9,1xxxxxxxxx” :the device reports dial tone after inputting “9”, stops tone until inputting “1”
7	T	Set the delayed time. For example: “<9:111>T2” : The device will dial out the matched number “111” after 2 seconds.

---

## Call Log

To view the call log information such as redial list , answered call and missed call

**Table 36** Call log

### Redial Calls

---

Redial List					
Index	NUMBER	Start Time	Duration	<input type="checkbox"/>	<input type="checkbox"/>
1	123	10/28 10:30	00:00:07	<input type="checkbox"/>	<input type="checkbox"/>
2	010123	10/28 12:02	00:00:01	<input type="checkbox"/>	<input type="checkbox"/>
3	010123	10/28 16:16	00:00:00	<input type="checkbox"/>	<input type="checkbox"/>
4	010123	10/28 16:16	00:00:00	<input type="checkbox"/>	<input type="checkbox"/>
5	123	10/28 16:20	00:00:13	<input type="checkbox"/>	<input type="checkbox"/>
6	123	10/28 16:21	00:00:34	<input type="checkbox"/>	<input type="checkbox"/>
7	123	10/29 10:50	00:00:10	<input type="checkbox"/>	<input type="checkbox"/>
8	123	10/29 14:36	00:00:01	<input type="checkbox"/>	<input type="checkbox"/>
9	123	10/29 15:05	00:00:23	<input type="checkbox"/>	<input type="checkbox"/>
10	123	10/29 15:06	00:00:05	<input type="checkbox"/>	<input type="checkbox"/>
...	...	...	...	<input type="checkbox"/>	<input type="checkbox"/>

---

### Answered Calls

Answered Calls				
Index	NUMBER	Start Time	Duration	
1	22222	10/21 09:56	00:00:40	<input type="checkbox"/>
2	110	10/21 18:14	00:00:03	<input type="checkbox"/>
3	110	10/21 18:15	00:00:07	<input type="checkbox"/>
4	sipp	10/23 13:40	00:00:06	<input type="checkbox"/>
5	sipp	10/24 18:05	00:00:05	<input type="checkbox"/>
6	sipp	10/24 18:05	00:00:05	<input type="checkbox"/>
7	sipp	10/25 15:38	00:00:03	<input type="checkbox"/>
8	sipp	10/25 15:42	00:00:06	<input type="checkbox"/>
9	sipp	10/25 15:55	00:00:10	<input type="checkbox"/>
10	sipp	10/25 16:03	00:00:02	<input type="checkbox"/>
...				

### Missed Calls

Missed Calls				
Index	NUMBER	Start Time	Duration	
1	110	10/21 09:50	00:00:03	<input type="checkbox"/>
2	555	10/22 12:04	00:00:03	<input type="checkbox"/>

# Administration

The user can manage the device in these webpages; you can configure the Time/Date, password, web access, system log and associated configuration TR069.

## Management

### Save config file

**Table 37** Save Config File

Save Config File	
Config File Upload & Download	
Local File	选择文件 未选择任何文件
<input type="button" value="Upload"/>	<input type="button" value="Download"/>

Field Name	Description
Config file upload and Upload: click on browse, select file in the local, press the upload button to download	begin uploading files

---

Download: click to download, and then select contains the path to download  
the configuration file

---

## Administrator settings

**Table 38** Administrator settings

Administrator Settings													
<b>Password Reset</b> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 5px;"> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">User Type</td> <td style="width: 70%; text-align: right;">Admin User ▼</td> </tr> <tr> <td>New User Name</td> <td style="text-align: right;">admin</td> </tr> <tr> <td>New Password</td> <td style="text-align: right;">(The maximum length is 25)</td> </tr> <tr> <td>Confirm Password</td> <td style="text-align: right;"></td> </tr> </table> </div>		User Type	Admin User ▼	New User Name	admin	New Password	(The maximum length is 25)	Confirm Password					
User Type	Admin User ▼												
New User Name	admin												
New Password	(The maximum length is 25)												
Confirm Password													
<b>Language</b> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 5px;"> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Language</td> <td style="width: 70%; text-align: right;">English ▼</td> </tr> </table> </div>		Language	English ▼										
Language	English ▼												
<b>VPN Access</b> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 5px;"> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Management Using VPN</td> <td style="width: 70%; text-align: right;">Disable ▼</td> </tr> </table> </div>		Management Using VPN	Disable ▼										
Management Using VPN	Disable ▼												
<b>Web Access</b> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 5px;"> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Remote Web Login</td> <td style="width: 70%; text-align: right;">Enable ▼</td> </tr> <tr> <td>Local Web Port</td> <td style="text-align: right;">80</td> </tr> <tr> <td>Web Port</td> <td style="text-align: right;">80</td> </tr> <tr> <td>Web SSL Port</td> <td style="text-align: right;">443</td> </tr> <tr> <td>Web Idle Timeout(0 - 60min)</td> <td style="text-align: right;">5</td> </tr> <tr> <td>Allowed Remote IP(IP1;IP2;...)</td> <td style="text-align: right;">0.0.0.0</td> </tr> </table> </div>		Remote Web Login	Enable ▼	Local Web Port	80	Web Port	80	Web SSL Port	443	Web Idle Timeout(0 - 60min)	5	Allowed Remote IP(IP1;IP2;...)	0.0.0.0
Remote Web Login	Enable ▼												
Local Web Port	80												
Web Port	80												
Web SSL Port	443												
Web Idle Timeout(0 - 60min)	5												
Allowed Remote IP(IP1;IP2;...)	0.0.0.0												
<b>Telnet Access</b> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 5px;"> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Remote Telnet</td> <td style="width: 70%; text-align: right;">Enable ▼</td> </tr> <tr> <td>Telnet Port</td> <td style="text-align: right;">23</td> </tr> <tr> <td>Allowed Remote IP(IP1;IP2;...)</td> <td style="text-align: right;">0.0.0.0</td> </tr> <tr> <td>HostName</td> <td style="text-align: right;">FWR8102</td> </tr> </table> </div>		Remote Telnet	Enable ▼	Telnet Port	23	Allowed Remote IP(IP1;IP2;...)	0.0.0.0	HostName	FWR8102				
Remote Telnet	Enable ▼												
Telnet Port	23												
Allowed Remote IP(IP1;IP2;...)	0.0.0.0												
HostName	FWR8102												

Field Name	Description
User type	Choose the user type from admin user and normal user and basic user
New User Name	You can modify the user name, set up a new user name
New Password	Input the new password
Confirm Password	Input the new password again
Language	Select the language for the web, the device support Chinese, English, and Spanish and so on
Remote Web Login	Enable/Disable remote Web login
Web Port	Set the port value which is used to login from Internet port and PC port, default is 80

Web Idle timeout	Set the Web Idle timeout time. The webpage can be logged out after Web Idle Timeout without any operation
Allowed Remote IP(IP1,IP2,...)	Set the IP from which a user can login the device remotely
Telnet Port	Set the port value which is used to telnet to the device

## NTP settings

**Table 39** NTP settings

Time/Date Setting																	
<b>NTP Settings</b> <table border="1"> <tr> <td>NTP Enable</td> <td>Enable ▼</td> </tr> <tr> <td>Option 42</td> <td>Disable ▼</td> </tr> <tr> <td>Current Time</td> <td>2016 - 01 - 19 . 05 : 55 : 06</td> </tr> <tr> <td>Sync with host</td> <td><input type="button" value="Sync with host"/></td> </tr> <tr> <td>NTP Settings</td> <td>(GMT-06:00) Central Time ▼</td> </tr> <tr> <td>Primary NTP Server</td> <td>pool.ntp.org</td> </tr> <tr> <td>Secondary NTP Server</td> <td></td> </tr> <tr> <td>NTP synchronization(1 - 1440min)</td> <td>60</td> </tr> </table>		NTP Enable	Enable ▼	Option 42	Disable ▼	Current Time	2016 - 01 - 19 . 05 : 55 : 06	Sync with host	<input type="button" value="Sync with host"/>	NTP Settings	(GMT-06:00) Central Time ▼	Primary NTP Server	pool.ntp.org	Secondary NTP Server		NTP synchronization(1 - 1440min)	60
NTP Enable	Enable ▼																
Option 42	Disable ▼																
Current Time	2016 - 01 - 19 . 05 : 55 : 06																
Sync with host	<input type="button" value="Sync with host"/>																
NTP Settings	(GMT-06:00) Central Time ▼																
Primary NTP Server	pool.ntp.org																
Secondary NTP Server																	
NTP synchronization(1 - 1440min)	60																
<b>Daylight Saving Time</b> <table border="1"> <tr> <td>Daylight Saving Time</td> <td>Disable ▼</td> </tr> </table>		Daylight Saving Time	Disable ▼														
Daylight Saving Time	Disable ▼																

Field Name	Description
NTP Enable	Enable/Disable NTP
Option 42	Enable/Disable DHCP option 42. This option specifies a list of the NTP servers available to the client by IP address
Current Time	Display current time
NTP Settings	Setting the Time Zone
Primary NTP Server	Primary NTP server's IP address or domain name
Secondary NTP Server	Options for NTP server's IP address or domain name
NTP synchronization	NTP synchronization cycle, cycle time can be 1 to 1440 minutes in any one, the default setting is 60 minutes

## Daylight Saving Time

**Table 40** Daylight Saving Time

Daylight Saving Time	
Daylight Saving Time	Enable <input type="button" value="▼"/>
Offset	60 <small>Min.</small>
Start Month	April <input type="button" value="▼"/>
Start Day of Week	Sunday <input type="button" value="▼"/>
Start Day of Week Last in Month	First in Month <input type="button" value="▼"/>
Start Hour of Day	2 <input type="button" value="▼"/>
Stop Month	October <input type="button" value="▼"/>
Stop Day of Week	Sunday <input type="button" value="▼"/>
Stop Day of Week Last in Month	Last in Month <input type="button" value="▼"/>
Stop Hour of Day	2 <input type="button" value="▼"/>

### Procedure

Step 1. Enable Daylight Savings Time.

Step 2. Set value of offset for Daylight Savings Time

Step 3: Set starting Month/Week/Day/Hour in Start Month/Start Day of Week Last in Month/Start Day of Week/Start Hour of Day, analogously set stopping Month/Week/Day/Hour in Stop Month/Stop Day of Week Last in Month/Stop Day of Week/Stop Hour of Day.

Step 4. Press Saving button to save and press Reboot button to active changes.

## System Log Setting

**Table 41** System log Setting

System Log Setting	
Syslog Setting	
Syslog Enable	Enable <input type="button" value="▼"/>
Syslog Level	INFO <input type="button" value="▼"/>
Login Syslog Enable	Enable <input type="button" value="▼"/>
Call Syslog Enable	Enable <input type="button" value="▼"/>
Net Syslog Enable	Enable <input type="button" value="▼"/>
Device Management Syslog Enable	Enable <input type="button" value="▼"/>
Device Alarm Syslog Enable	Enable <input type="button" value="▼"/>
Kernel Syslog Enable	Enable <input type="button" value="▼"/>
Remote Syslog Enable	Disable <input type="button" value="▼"/>
Remote Syslog Server	<input type="text"/>

Field Name	Description
Syslog Enable	Enable/Disable syslog function
Syslog Level	Select the system log, there is INFO and Debug two grades, the Debug INFO can provide more information
Remote Syslog Enable	Enable/Disable remote syslog function
Remote Syslog server	Add a remote server IP address
Syslog Enable	Enable/Disable syslog function

## Factory Defaults Setting

**Table 42** Factory Defaults Setting

Factory Defaults Setting	
Factory Defaults Lock	Disable ▾

Description
When enabled, the device may not be reset to factory defaults until this parameter is reset to Disable

## Factory Defaults

**Table 43** Factory Defaults

Factory Defaults	
Reset to Factory Defaults	Factory Default

Description
Click Factory Default to restore the residential adapter to factory settings

## Firmware Upgrade

**Table 44** Firmware upgrade

Status	Network	SIP Account	Phone	<b>Administration</b>				
Management	Firmware Upgrade	Scheduled Tasks	Certificates	Provision	SNMP	TR069		
<b>Firmware Management</b>								
<b>Firmware Upgrade</b> <hr/> <p>Local Upgrade <input type="button" value="选择文件"/> 未选择任何文件</p> <hr/>								
<b>Description</b> <hr/> <ol style="list-style-type: none"> <li>1. Choose upgrade file type from Image File and Dial Rule</li> <li>2. Press “Browse..” button to browser file</li> <li>3. Press <input type="button" value="Upgrade"/> to start upgrading</li> </ol> <hr/>								

## Scheduled Tasks

**Table 45** Scheduled Tasks

Status	Network	SIP Account	Phone	<b>Administration</b>								
Management	Firmware Upgrade	Scheduled Tasks	Certificates	Provision	SNMP	TR069						
<b>Scheduled Tasks</b>												
<b>Scheduled Reboot</b> <hr/> <p>Scheduled Reboot <input type="button" value="Disable"/> <input type="button" value="Enable"/></p> <p>Scheduled Mode <input type="button" value="EveryDay"/> <input type="button" value="EveryWeek"/></p> <p>Time <input type="button" value="00"/> : <input type="button" value="00"/></p> <hr/>												
<b>Scheduled PPPOE</b> <hr/> <p>Scheduled PPPOE <input type="button" value="Disable"/> <input type="button" value="Enable"/></p> <p>Scheduled Mode <input type="button" value="EveryDay"/> <input type="button" value="EveryWeek"/></p> <p>Time <input type="button" value="00"/> : <input type="button" value="00"/></p> <hr/>												
<table border="1"> <thead> <tr> <th>Field Name</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td colspan="2"><b>Scheduled Reboot</b></td> </tr> </tbody> </table>									Field Name	Description	<b>Scheduled Reboot</b>	
Field Name	Description											
<b>Scheduled Reboot</b>												

Scheduled Reboot	Enable/Disable scheduled Reboot
Scheduled Mode	Select scheduled Mode
Time	Set the time to restart
<b>Scheduled PPPoE</b>	
Scheduled PPPoE	Enable/Disable scheduled PPPoE
Scheduled Mode	Select scheduled Mode
Time	Set the time to start PPPoE

## Provision

Provisioning allows the router to auto-upgrade and auto-configure devices which support TFTP, HTTP and HTTPS .

- Before testing or using TFTP, user should have tftp server and upgrading file and configuring file.
- Before testing or using HTTP, user should have http server and upgrading file and configuring file.
- Before testing or using HTTPS, user should have https server and upgrading file and configuring file and CA Certificate file (should same as https server's) and Client Certificate file and Private key file

User can upload a CA Certificate file and Client Certificate file and Private Key file in the Security page.

**Table 46** Provision

Status	Network	SIP Account	Phone	Administration																																					
Management	Firmware Upgrade	Scheduled Tasks	Certificates	Provision	SNMP	TR069																																			
<b>Provision</b> <table border="1"> <thead> <tr> <th colspan="2">Configuration Profile</th> </tr> </thead> <tbody> <tr> <td>Provision Enable</td> <td>Enable ▼</td> </tr> <tr> <td>Resync On Reset</td> <td>Enable ▼</td> </tr> <tr> <td>Resync Random Delay(sec)</td> <td>40</td> </tr> <tr> <td>Resync Periodic(sec)</td> <td>3600</td> </tr> <tr> <td>Resync Error Retry Delay(sec)</td> <td>3600</td> </tr> <tr> <td>Forced Resync Delay(sec)</td> <td>14400</td> </tr> <tr> <td>Resync After Upgrade</td> <td>Enable ▼</td> </tr> <tr> <td>Resync From SIP</td> <td>Disable ▼</td> </tr> <tr> <td>Option 66</td> <td>Enable ▼</td> </tr> <tr> <td>Option 67</td> <td>Enable ▼</td> </tr> <tr> <td>Config File Name</td> <td>\$(MA)</td> </tr> <tr> <td>User Agent</td> <td></td> </tr> <tr> <td>User Name</td> <td></td> </tr> <tr> <td>Password</td> <td></td> </tr> <tr> <td>Profile Rule</td> <td>http://prv1.flyingvoice.net:69/config/\$(MA)?mac=\$(MA)&amp;</td> </tr> </tbody> </table>										Configuration Profile		Provision Enable	Enable ▼	Resync On Reset	Enable ▼	Resync Random Delay(sec)	40	Resync Periodic(sec)	3600	Resync Error Retry Delay(sec)	3600	Forced Resync Delay(sec)	14400	Resync After Upgrade	Enable ▼	Resync From SIP	Disable ▼	Option 66	Enable ▼	Option 67	Enable ▼	Config File Name	\$(MA)	User Agent		User Name		Password		Profile Rule	http://prv1.flyingvoice.net:69/config/\$(MA)?mac=\$(MA)&
Configuration Profile																																									
Provision Enable	Enable ▼																																								
Resync On Reset	Enable ▼																																								
Resync Random Delay(sec)	40																																								
Resync Periodic(sec)	3600																																								
Resync Error Retry Delay(sec)	3600																																								
Forced Resync Delay(sec)	14400																																								
Resync After Upgrade	Enable ▼																																								
Resync From SIP	Disable ▼																																								
Option 66	Enable ▼																																								
Option 67	Enable ▼																																								
Config File Name	\$(MA)																																								
User Agent																																									
User Name																																									
Password																																									
Profile Rule	http://prv1.flyingvoice.net:69/config/\$(MA)?mac=\$(MA)&																																								

Field Name	Description
Provision Enable	Enable provision or not.
Resync on Reset	Enable resync after restart or not
Resync Random	Set the maximum delay for the request of synchronization file. The default is 40
Resync Periodic(sec)	If the last resync was failure, The router will retry resync after the “Resync Error
Resync Error Retry	Set the periodic time for resync, default is 3600s
Forced Resync	If it’s time to resync, but the device is busy now, in this case, the router will
Resync After	Enable firmware upgrade after resync or not. The default is Enabled
Resync From SIP	Enable/Disable resync from SIP
Option 66	It is used for In-house provision mode only. When use TFTP with option 66 to
Config File Name	It is used for In-house provision mode only. When use TFTP with option 66 to
Profile Rule	URL of profile provision file

**Table 47** Firmware Upgrade

**Firmware Upgrade**

Enable Upgrade	Enable ▼
Upgrade Error Retry Delay (sec)	3600
Upgrade Rule	

Field Name	Description
Upgrade Enable	Enable firmware upgrade via provision or not
Upgrade Error Retry	If the last upgrade fails, the router will try upgrading
Delay(sec)	again after “Upgrade Error Retry Delay” period, default is 3600s
Upgrade Rule	URL of upgrade file

## SNMP

**Table 48** SNMP

Status	Network	SIP Account	Phone	Administration				
Management	Firmware Upgrade	Scheduled Tasks	Certificates	Provision	SNMP	TR069		

**SNMP Configuration**

Field Name	Description
SNMP Service	Enable or Disable the SNMP service
Trap Server Address	Enter the trap server address for sending SNMP traps
Read Community Name	String value that is used as a password to request information via SNMP from the device
Write Community Name	String value that is used as a password to write configuration values to the device SNMP
Trap Community	String value used as a password for retrieving traps from the device
Trap period interval(sec)	The interval for which traps are sent from the device

## TR-069

TR-069 provides the possibility of auto configuration of internet access devices and reduces the cost of management. TR-069 (short for Technical Report 069) is a DSL Forum technical specification entitled CPE WAN Management Protocol (CWMP). It defines an application layer protocol for remote management of end-user devices. Using TR-069, the terminals establish connection with the Auto Configuration Servers (ACS) and get configured automatically.

### Device Configuration using TR-069

The TR-069 configuration page is available under Administration menu.

**Table 49** TR069

Status	Network	SIP Account	Phone	<b>Administration</b>			
Management	Firmware Upgrade	Scheduled Tasks	Certificates	Provision	SNMP	TR069	

**TR069 Configuration**

**ACS**

TR069 Enable	Enable ▼
CWMP	Enable ▼
ACS URL	http://acs1.flyingvoice.net:8080/tr069
User Name	
Password	
Periodic Inform Enable	Enable ▼
Periodic Inform Interval	3600

**Connect Request**

User Name	FGW4148-16S
Password	*****

Field Name	Description
<b>ACS parameters</b>	
TR069 Enable	Enable or Disable TR069
CWMP	Enable or Disable CWMP
ACS URL	ACS URL address
User Name	ACS username
Password	ACS password
Periodic Inform	Enable the function of periodic inform or not. By default it is Enabled
Periodic Inform	Periodic notification interval with the unit in seconds. The default value is 3600s
<b>Connect Request parameters</b>	
User Name	The username used to connect the TR069 server to the DUT.
Password	The password used to connect the TR069 server to the DUT.

## Diagnosis

In this page, user can do packet trace, ping test and traceroute test to diagnose the device's connection status.

**Table 50** Diagnosis

### Description

#### 1. Packet Trace

Users can use the packet trace feature to intercept packets which traverse the device. Click the Start button to start home adapter tracking and keep refreshing the page until the message trace shows to stop, click the Save button to save captured packets.

#### 2. Ping Test

Enter the destination IP or host name, and then click Apply, device will perform ping test.

**Ping Test**

**Ping Test**

Dest IP/Host Name	<input type="text"/>
WAN Interface	1_TR069_VOICE_INTERNET_R_VID_ <input type="button" value="▼"/>
<pre>PING www.baidu.com (115.239.210.26): 56 data bytes 64 bytes from 115.239.210.26: seq=0 ttl=54 time=43.979 ms 64 bytes from 115.239.210.26: seq=1 ttl=54 time=53.875 ms 64 bytes from 115.239.210.26: seq=2 ttl=54 time=45.226 ms 64 bytes from 115.239.210.26: seq=3 ttl=54 time=49.534 ms 64 bytes from 115.239.210.26: seq=4 ttl=54 time=49.045 ms  --- www.baidu.com ping statistics --- 5 packets transmitted, 5 packets received, 0% packet loss round-trip min/avg/max = 43.979/48.331/53.875 ms</pre>	
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

#### 3. Traceroute Test

Enter the destination IP or host name, and then click Apply, device will perform traceroute test.

**Traceroute Test**

**Traceroute Test**

Dest IP/Host Name	<input type="text" value="www.google.com"/>
WAN Interface	1_MANAGEMENT_VOICE_INTERNET_R_VID_ <input type="button" value="▼"/>
<pre>traceroute to www.google.com (216.58.208.68), 30 hops max, 38 byte packets 1 10.110.134.254 (10.110.134.254) 1.017 ms 9.507 ms 1.419 ms 2 * * * 3 * * * 4 * * * 5 * * * 6 * * * 7 * * * 8 * * * 9 * * * 10 * * * ... * * *</pre>	
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

## Operating Mode

**Table 51** Operating mode

**Operating Mode Settings**

Operating Mode: Basic Mode

**Description**

Choose the Operation Mode as Basic Mode or Advanced Mode

## System Log

**Table 52** System log

**Status** **Network** **SIP Account** **Phone** **Administration**

**Basic** **LAN Host** **Syslog**

Refresh Clear Save

Manufacturer:FLYINGVOICE  
ProductClass:FGW4148-16S  
SerialNumber:  
BuildTime:201609181809  
IP:192.168.1.1  
HWVer:V1.1  
SWVer:V3.11  
<Thu Nov 9 15:26:56 2017> admin: 5 admin 0 SW [kworker/u:0]  
<Thu Nov 9 15:26:56 2017> admin: 6 admin 0 SW [migration/0]  
<Thu Nov 9 15:26:56 2017> admin: 7 admin 0 SW [migration/1]  
<Thu Nov 9 15:26:56 2017> admin: 8 admin 0 SW [kworker/1:0]  
<Thu Nov 9 15:26:56 2017> admin: 9 admin 0 SW [ksoftirqd/1]  
<Thu Nov 9 15:26:56 2017> admin: 10 admin 0 SW< [khelper]  
<Thu Nov 9 15:26:56 2017> admin: 11 admin 0 SW [sync\_supers]  
<Thu Nov 9 15:26:56 2017> admin: watchdog.pid

**Description**

If you enable the system log in Status/syslog webpage, you can view the system log in this webpage.

## Logout

**Table 53** Logout



Press the logout button to logout, and then the login window will appear.

## Reboot

Press the **Reboot** button to reboot the device.

---

# Chapter 5 IPv6 address configuration

---

The router devices support IPv6 addressing. This chapter covers:

- [Introduction](#)
- [IPv6 Advance](#)
- [Configuring IPv6](#)
- [Viewing WAN port status](#)
- [IPv6 DHCP configuration for LAN/WLAN clients](#)
- [LAN DHCPv6](#)

## Introduction


DHCPv6 protocol is used to automatically provision/configure IPv6 capable end points in a local network. In addition to acquiring an IPv6 IP address for the WAN interface and its associated LAN/WLAN clients, the devices are also capable of prefix delegation.

The Routers devices support the following types of modes of IPv6 addresses:

- Stateless DHCPv6
- Statefull DHCPv6

**Table 54** IPv6 Modes

Mode	Description
Stateless	In Stateless DHCPv6 mode, the Routers devices listen for ICMPv6 Router Advertisements messages which are periodically sent out by the routers on the local link or requested by the node using a Router Advertisements solicitation message. The device derives a unique IPv6 address using prefix receives from the router and its own MAC address.
Statefull	In Statefull DHCPv6 mode, the client works exactly as IPv4 DHCP, in which hosts receive both their IPv6 addresses and additional parameters from the DHCP server.

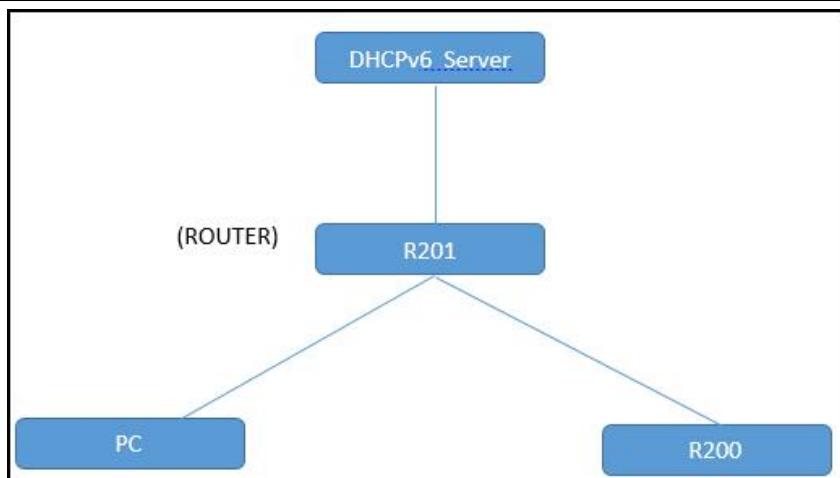

## IPv6 Advance

To enable IPv6 functionality:

Navigate to Network > IPv6 Advanced page.

Select Enable from the IPv6 Enable drop-down list.

Click Save.

**Table 55** Enabling IPv6

Type commands, here PC can get the default adapter: fe80::221:f2ff:fe02:1a4f%15.

```
物理地址 . . . . . : F0-DE-F1-C8-96-66
DHCP 已启用 . . . . . : 是
自动配置已启用 . . . . . : 是
本地链接 IPv6 地址 . . . . . : fe80::2db3:666d:88d9:d1c2%15<首选>
IPv4 地址 . . . . . : 192.168.11.90<首选>
子网掩码 . . . . . : 255.255.255.0
获得租约的时间 . . . . . : 2016年2月2日 星期二 上午 10:43:34
租约过期的时间 . . . . . : 2016年2月3日 星期三 上午 10:43:33
默认网关 . . . . . : fe80::221:f2ff:fe02:1a4f%15
                                         192.168.11.1
DHCP 服务器 . . . . . : 192.168.11.1
DHCPv6 IAID . . . . . : 368107249
DHCPv6 客户端 DUID . . . . . : 00-01-00-01-1E-0A-7B-28-F0-DE-F1-C8-96-66
DNS 服务器 . . . . . : 192.168.11.1
                                         192.168.10.1
TCPIP 上的 NetBIOS . . . . . : 已启用
```

We can ping through this address.

```
C:\> ping fe80::221:f2ff:fe02:1a4f%15

正在 Ping fe80::221:f2ff:fe02:1a4f%15 具有 32 字节的数据:
来自 fe80::221:f2ff:fe02:1a4f%15 的回复: 时间=1ms
来自 fe80::221:f2ff:fe02:1a4f%15 的回复: 时间<1ms
来自 fe80::221:f2ff:fe02:1a4f%15 的回复: 时间<1ms
来自 fe80::221:f2ff:fe02:1a4f%15 的回复: 时间<1ms

fe80::221:f2ff:fe02:1a4f%15 的 Ping 统计信息:
    数据包: 已发送 = 4, 已接收 = 4, 丢失 = 0 (0% 丢失),
往返行程的估计时间(以毫秒为单位):
    最短 = 0ms, 最长 = 1ms, 平均 = 0ms
```

## LAN DHCPv6

When IPv6 is enabled, the LAN/WLAN clients of Routers can be configured to receive IPv6 addresses from locally configured IPv6 pool or from an external DHCPv6 server.

To enable LAN DHCPv6 service:

Status	<b>Network</b>	SIP Account	Phone	Administration				
WAN	LAN	IPv6 Advanced	IPv6 WAN	IPv6 LAN	VPN	DMZ	MAC Clone	Port Setting
<b>IPv6 LAN Setting</b>								
IPv6 Address	<input type="text" value="fec0::1"/>							
IPv6 Prefix Length	<input type="text" value="64"/> (0-128)							
DHCPv6 Server	<input type="button" value="Disable ▼"/>							
DHCPv6 Status	<input type="button" value="Stateless ▼"/>							
DHCPv6 Mode	<input type="button" value=""/>							
Domain Name	<input type="text"/>							
Server Preference	<input type="text" value="255"/> (0-255)							
Primary DNS Server	<input type="text"/>							
Secondary DNS Server	<input type="text"/>							
Lease Time	<input type="text" value="86400"/> (0-86400sec)							
IPv6 Address Pool	<input type="text"/> - <input type="text"/> / <input type="text"/>							
Router Advertisement	<input type="button" value="Disable ▼"/>							
Router Advertisement	<input type="button" value=""/>							
Advertise Interval	<input type="text" value="30"/> (10-1800sec)							
RA Managed Flag	<input type="button" value="Disable ▼"/>							
RA Other Flag	<input type="button" value="Enable ▼"/>							
Prefix	<input type="text"/> / <input type="text"/>							
Prefix Lifetime	<input type="text" value="3600"/> (0-3600sec)							

## Configuring IPv6

### Configuring Statefull IPv6

1. Navigate to Network > IPv6WAN page. The following window is displayed:

Stateless mode dhcpcv6 client send ipv6 address and DNS request, and the server reply the DNS server and Domain name, and ipv6 address.

**Pv6 LAN Setting**

**Pv6 LAN Setting**

IPv6 Address	fec0::1
IPv6 Prefix Length	48 (0-128)
DHCPv6 Server	Enable
DHCPv6 Status	Enable
<b>DHCPv6 Mode</b>	<b>Statefull</b>
Domain Name	flyingvoice.com
Server Preference	255 (0-255)
Primary DNS Server	fec0::2
Secondary DNS Server	fec0::3
Lease Time	86400 (0-86400sec)
IPv6 Address Pool	fec0::100 - fec0::200 / 48
Router Advertisement	Enable
Advertise Interval	30 (10-1800sec)
RA Managed Flag	Enable
RA Other Flag	Disable
Prefix	/
Prefix Lifetime	3600 (0-3600sec)

DHCPv6 client configure as this

**Table 56** Configuring Statefull IPv6

**IPv6 WAN Setting**

**IPv6 WAN Setting**

Connection Type	DHCPv6
DHCPv6 Address Settings	Stateless
Prefix Delegation	Disable

**Field Name** **Description**

Connection Type	Select connection type
DHCPv6 Address Settings	Set it to statefull mode.
Prefix Delegation	Select Enable.

In this way the Router B can get ipv6 address and DNS address, for more information please check the packets `dhcpv6_stateful.pcap`.

Also we can check via CLI.

```
Link encap:Ethernet HWaddr 00:21:F2:08:16:59
inet addr:192.168.11.64 Bcast:192.168.11.255 Mask:255.255.255.0
inet6 addr: fec0::100/128 Scope:Site
inet6 addr: fe80::221:f2ff:fe08:1659/64 Scope:Link
  UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
  RX packets:1235 errors:0 dropped:0 overruns:0 frame:0
  TX packets:1346 errors:0 dropped:0 overruns:0 carrier:0
  collisions:0 txqueuelen:0
  RX bytes:103756 <101.3 KiB> TX bytes:1329724 <1.2 MiB>
```

In this mode, PC can get ipv6 address too.

```
# cat /etc/resolv.conf
nameserver 192.168.11.1
nameserver 192.168.10.1

nameserver fec0::2
nameserver fec0::3
#
```

以太网适配器 本地连接：

```
连接特定的 DNS 后缀 . . . . . : flyingvoice.com
描述. . . . . : Intel(R) 82579LM Gigabit Network Connection
物理地址. . . . . : F0-DE-F1-C8-96-66
DHCP 已启用. . . . . : 是
自动配置已启用. . . . . : 是
本地站点的 IPv6 地址. . . . . : fec0::101z1<首选>
获得租约的时间 . . . . . : 2016年2月2日 星期二 上午 11:47:06
租约过期的时间 . . . . . : 2016年2月3日 星期三 上午 11:47:06
本地链接 IPv6 地址. . . . . : fe80::2db3:666d:88d9:dic2z15<首选>
IPv4 地址 . . . . . : 192.168.11.90<首选>
子网掩码 . . . . . : 255.255.255.0
获得租约的时间 . . . . . : 2016年2月2日 星期二 上午 11:02:22
租约过期的时间 . . . . . : 2016年2月3日 星期三 上午 11:25:14
默认网关. . . . . : fe80::221:f2ff:fe02:1a4fx15
                                         192.168.11.1
DHCP 服务器 . . . . . : 192.168.11.1
DHCPv6 IAID . . . . . : 368107249
DHCPv6 客户端 DUID . . . . . : 00-01-00-01-1E-0A-7B-28-F0-DE-F1-C8-96

DNS 服务器 . . . . . : fec0::2z1
                         fec0::3z1
                         192.168.11.1
                         192.168.11.1
```

## Configuring Stateless IPv6

Stateless mode dhcpcv6 client only send DNS request, and the server reply the DNS server and Domain name, DHCPv6 server configure as the picture shows, DHCPv6 client configure as this .



After the configuration, we can check the packets about the dhcpcv6 client. For more information, please check `dhcpcv6_stateless.pcap`.

In the router we can check via CLI. But you can not see ipv6 address

```
# cat /etc/resolv.conf
nameserver 192.168.11.1
nameserver 192.168.10.1
nameserver fec0::2
nameserver fec0::3
#
```

ping DNS address

When in stateful mode, device can get ipv6 address from dhcpcv6 server, in this way we can ping a dns, verify if it can do domain name resolve by ipv6 dns address. Check this we can use the packets to prove. You can find on this packet `dns.pcap`


## WAN DHCPv6 client

As I show you with router B, router B uses the WAN DHCPv6 client, you can refer to the part 2 to check the stateful and stateless mode. Another thing I need to show you is Prefix distribution.

### Prefix distribution

- 1) WAN port DHCPv6 server enable prefix distribution feature.
- 2) WAN port DHCPv6 client enable prefix distribution
- 3) LAN port DHCPv6 server disable dhcp service

Topology like this

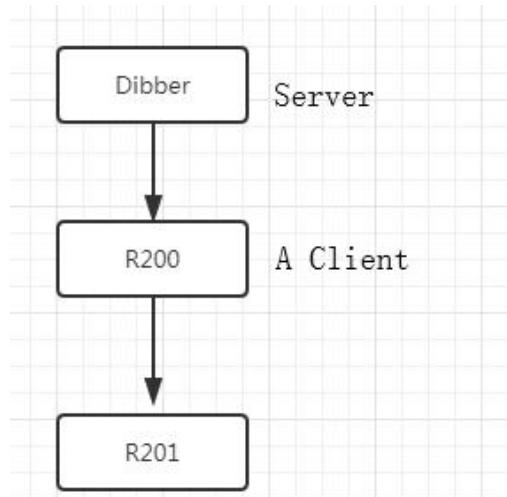

Dibber dhcpcv6 server configuration see the attach.

This time I use the stateful mode Router A can get an ipv6 address ,WAN port and LAN port both can get ipv6 address from the dibbler server.

```

br0      Link encap:Ethernet HWaddr 00:21:F2:02:1A:4F
        inet addr:192.168.11.1 Bcast:192.168.11.255 Mask:255.255.255.0
        inet6 addr: 2001:db8:352e:0:221:f2ff:fe02:1a4f/48 Scope:Global
        inet6 addr: fe80::221:f2ff:fe02:1a4f/64 Scope:Link
        inet6 addr: fec0::1/48 Scope:Site
        UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
        RX packets:1255 errors:0 dropped:0 overruns:0 frame:0
        TX packets:1550 errors:0 dropped:0 overruns:0 carrier:0
        collisions:0 txqueuelen:0
        RX bytes:226565 (221.2 KiB) TX bytes:613327 (598.9 KiB)

```

The behind router also get an ipv6 address

```

eth2.1    Link encap:Ethernet HWaddr 00:21:F2:08:16:59
          inet addr:192.168.11.64 Bcast:192.168.11.255 Mask:255.255.255.0
          inet6 addr: 2001:db8:352e:0:221:f2ff:fe08:1659/64 Scope:Global
          inet6 addr: fe80::221:f2ff:fe08:1659/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
          RX packets:693 errors:0 dropped:0 overruns:0 frame:0
          TX packets:563 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:58337 (56.9 KiB) TX bytes:375603 (366.7 KiB)

```

Use this ipv6 address we can ping Router A LAN ipv6 address

```
C:\Users\Administrator>ping 2001:db8:352e:0:221:f2ff:fe02:1a4f
```

```
正在 Ping 2001:db8:352e:0:221:f2ff:fe02:1a4f 具有 32 字节的数据:
来自 2001:db8:352e:0:221:f2ff:fe02:1a4f 的回复: 时间<1ms
来自 2001:db8:352e:0:221:f2ff:fe02:1a4f 的回复: 时间<1ms
来自 2001:db8:352e:0:221:f2ff:fe02:1a4f 的回复: 时间<1ms
来自 2001:db8:352e:0:221:f2ff:fe02:1a4f 的回复: 时间<1ms
```

## Viewing WAN/LAN port status

To view the status of WAN port:

Navigate to Status page.

### LAN status

Now only LAN ipv6 dhcpcv6 mode is statefull,it can display ipv6 client ipv6 address

Status																																		
Basic		LAN Host		Syslog																														
<b>LAN Host info</b>																																		
<table border="1"> <thead> <tr> <th>MAC Address</th><th>IP Address</th><th>Interface Type</th><th>Address Source</th><th>Expires</th><th>Host name</th><th>Status</th></tr> </thead> <tbody> <tr> <td>00:21:F2:AC:BA:19</td><td>192.168.11.207</td><td>LAN2</td><td>DHCP</td><td>23:57:23</td><td>cnPilot R201</td><td>Active</td></tr> <tr> <td>00:27:19:95:22:FF</td><td>192.168.11.203</td><td>LAN3</td><td>DHCP</td><td>23:57:41</td><td>WIN-20151218RLZ</td><td>Active</td></tr> <tr> <td>18:CF:5E:CB:F9:C9</td><td>192.168.11.66</td><td>FV-TEST</td><td>DHCP</td><td>23:59:26</td><td>MQGAADTGXWBD0ZZ</td><td>Active</td></tr> </tbody> </table>							MAC Address	IP Address	Interface Type	Address Source	Expires	Host name	Status	00:21:F2:AC:BA:19	192.168.11.207	LAN2	DHCP	23:57:23	cnPilot R201	Active	00:27:19:95:22:FF	192.168.11.203	LAN3	DHCP	23:57:41	WIN-20151218RLZ	Active	18:CF:5E:CB:F9:C9	192.168.11.66	FV-TEST	DHCP	23:59:26	MQGAADTGXWBD0ZZ	Active
MAC Address	IP Address	Interface Type	Address Source	Expires	Host name	Status																												
00:21:F2:AC:BA:19	192.168.11.207	LAN2	DHCP	23:57:23	cnPilot R201	Active																												
00:27:19:95:22:FF	192.168.11.203	LAN3	DHCP	23:57:41	WIN-20151218RLZ	Active																												
18:CF:5E:CB:F9:C9	192.168.11.66	FV-TEST	DHCP	23:59:26	MQGAADTGXWBD0ZZ	Active																												
<b>Ipv6 LAN Host Info</b>																																		
<table border="1"> <thead> <tr> <th>IPv6 Address</th></tr> </thead> <tbody> <tr> <td>fec0::100</td></tr> <tr> <td>fec0::101</td></tr> </tbody> </table>								IPv6 Address	fec0::100	fec0::101																								
IPv6 Address																																		
fec0::100																																		
fec0::101																																		

### WAN status

Network Status	
Internet Port Status	
Connection Type	DHCP
IP Address	192.168.11.207 <input type="button" value="Renew"/>
IPv6 Address	fe80::221:f2ff:feac:ba19/64 fec0::100/128
Subnet Mask	255.255.255.0
Default Gateway	192.168.11.1
Primary DNS	192.168.11.1
Secondary DNS	192.168.10.1
Ipv6 Primary DNS	fec0::2
Ipv6 Secondary DNS	fec0::3
WAN Port Status	1000Mbps Full

---

## Chapter 6 Troubleshooting Guide

---

This chapter covers:

- Configuring PC to get IP Address automatically
- Cannot connect to the Web
- Forgotten Password

# Configuring PC to get IP Address automatically


Follow the below process to set your PC to get an IP address automatically:

Step 1 : Click the “Start” button

Step 2 : Select “control panel” , then double click “network connections” in the “control panel”

Step 3 : Right click the “network connection” that your PC uses, select “attribute” and you can see the interface as shown in Figure 3.

Step 4.: Select “Internet Protocol (TCP/IP)” , click “attribute” button, then click the “Get IP address automatically” .

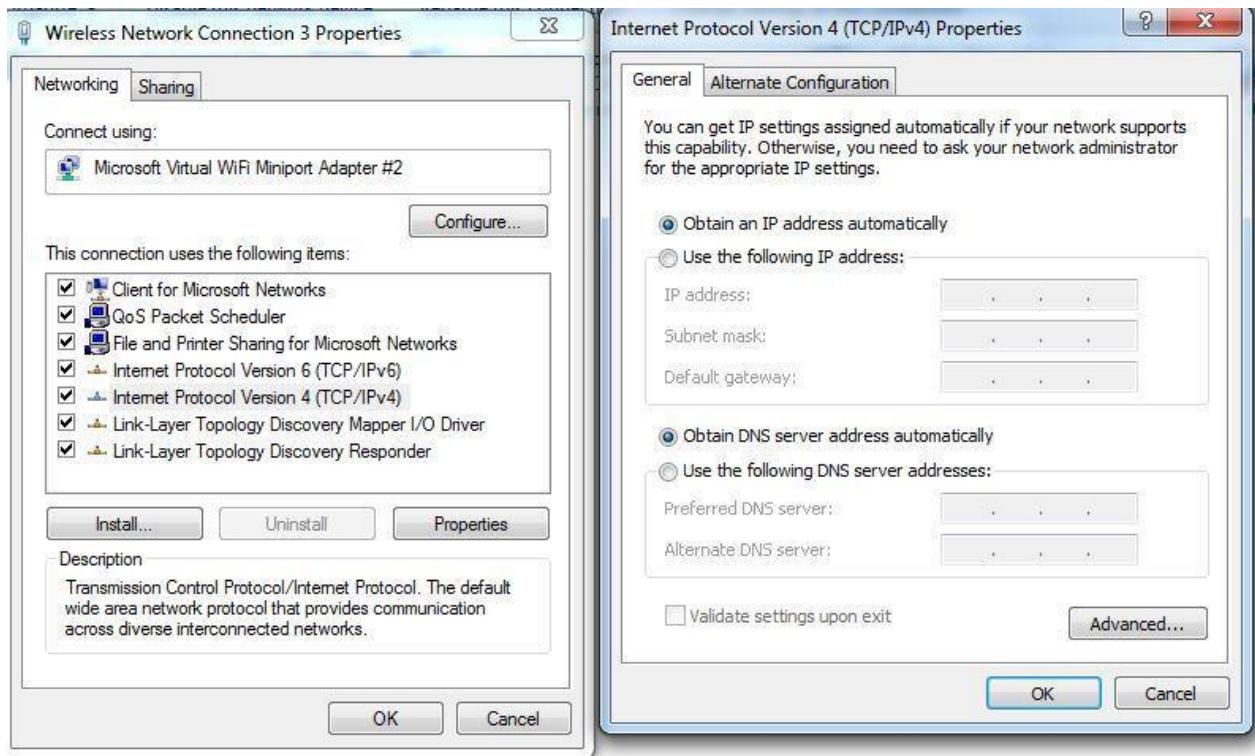

## Cannot connect to the Web

Solution:

- Check if the Ethernet cable is properly connected
- Check if the URL is correct. The format of URL is: http:// the IP address
- Check on any other browser apart from Internet explorer such Google
- Contact your administrator, supplier or ITSP for more information or assistance.

## Forgotten Password

If you have forgotten the management password, you cannot access the configuration web GUI. Solution:

To factory default: press and hold reset button for 10 seconds.